



Engineers • Consultants • Inspectors

**NONMETALLIC MINING SITE
RECLAMATION PLAN**

For

**Proposed Limestone Quarry
Gerke Excavating, Inc.**



**Town of Wells
Monroe County, Wisconsin**

September 2013

Prepared by:

GENERAL ENGINEERING COMPANY
916 Silver Lake Drive
P.O. Box 340
Portage, WI 53901
Phone: (608) 742-2169
GEC No. 2-0113-46H

Owner:

GERKE EXCAVATING, INC.
15341 State Highway 131
Tomah, WI 54660
Phone: (608) 372-4203
Fax: (608) 372-4139

NONMETALLIC MINING SITE RECLAMATION PLAN
TABLE OF CONTENTS

Proposed Limestone Quarry, Gerke Excavating, Inc.

1.0	Background & General Information	
1.1	Description of Project Activity	1
1.2	Project Location	1
2.0	State and Local Requirements	
2.1	Wisconsin DNR Requirements	2
2.1.1	Surface Water and Wetland Protection	2
2.1.2	Groundwater Protection	2
2.1.3	Topsoil Management	2
2.1.4	Final Grading and Slopes	2
2.1.5	Topsoil Redistribution for Reclamation	2
2.1.6	Revegetation and Site Stabilization	2-3
2.1.7	Assessing Completion of Successful Reclamation	3
2.1.8	Maintenance	3
2.2	Monroe County Nonmetallic Mining Ordinance	3
2.3	Submittal List	3
3.0	Reclamation Plan	
3.1	Site Information	3-6
3.1.1	Legal Description	3-4
3.1.2	Property Boundary	4
3.1.3	Aerial Extent	5
3.1.4	Geologic Composition and Depth of Mineral Deposits	5
3.1.5	Distribution, Thickness and Type of Topsoil	5
3.1.6	Groundwater Information	5
3.1.7	Location of Surface Waters	5
3.1.8	Existing Topography	5
3.1.9	Locations of Manmade Features	6
3.2	Post Mining Land Use	6
3.3	Reclamation Measures	6-9
3.3.1	Final Grades and Slopes	6
3.3.2	Topsoil Management	6-7
3.3.3	Structures	7
3.3.4	Revegetation Plan	7-8
3.3.5	Revegetation Standards	8
3.3.6	Erosion Control	8-9
3.3.7	Site Maintenance	9
3.4	Criteria for Successful Reclamation	9
3.5	Certification of the Reclamation Plan	9
3.6	Final Site Actions	9
3.7	Certification of the Reclamation Plan	10
3.8	Financial Assurance	10

NONMETALLIC MINING SITE RECLAMATION PLAN
TABLE OF CONTENTS

Proposed Limestone Quarry, Gerke Excavating, Inc.

APPENDICES:

Appendix A – General Maps and Additional Information

Monroe County Parcel Map	A1
Surrounding Land Uses	A2
USGS Topographic Map	A3
USGS Topographic Map with Aerial	A4
Surface Waters, Wetlands, and Floodplains	A5
WISC Land Cover	A6
Water Table Elevation	A7
Bedrock Geology of Wisconsin	A8
NRCS Web Soil Survey – Soil Map	A9-A10
NRCS Web Soil Survey – Soil Descriptions	A11-A20

Appendix B – Site Specific Maps and Information

Proposed Quarry	B1.0
Reclaimed Quarry	B1.1
Erosion Control Details	B1.2
Erosion Control Specifications	B1.3
Seed Mix Specifications	B2.0

Appendix C – Monroe County Nonmetallic Mining Permit Application

Monroe County Form NM-02, REV 2013	C1-C2
Metes and Bounds Site Description	C3-C5

NONMETALLIC MINING RECLAMATION

For
Gerke Excavating
New Quarry Site

Town of Wells
Monroe County, Wisconsin
September 2013

1.0 BACKGROUND AND GENERAL INFORMATION

1.1 Description of Project Activity


The purpose of this report is to provide a framework for the nonmetallic mining reclamation at the proposed quarry site. The site is located in the Town of Wells, Monroe County, 7 miles southeast of Sparta. The proposed mining quarry includes primarily wooded areas and one metal building on site with gravel.

1.2 Project Location

The project site is located in the SE, SW & NW 1/4s of the SE 1/4 of Section 1, T16N, R3W, Town of Wells, Monroe County, Wisconsin, containing approximately 98.5 acres.

Said property consists primarily of a sloped wooded hill and agricultural field that will be lowered in the mining operation. Figure 1.2-1 is USGS location map of the surrounding area.

Figure 1.2-1

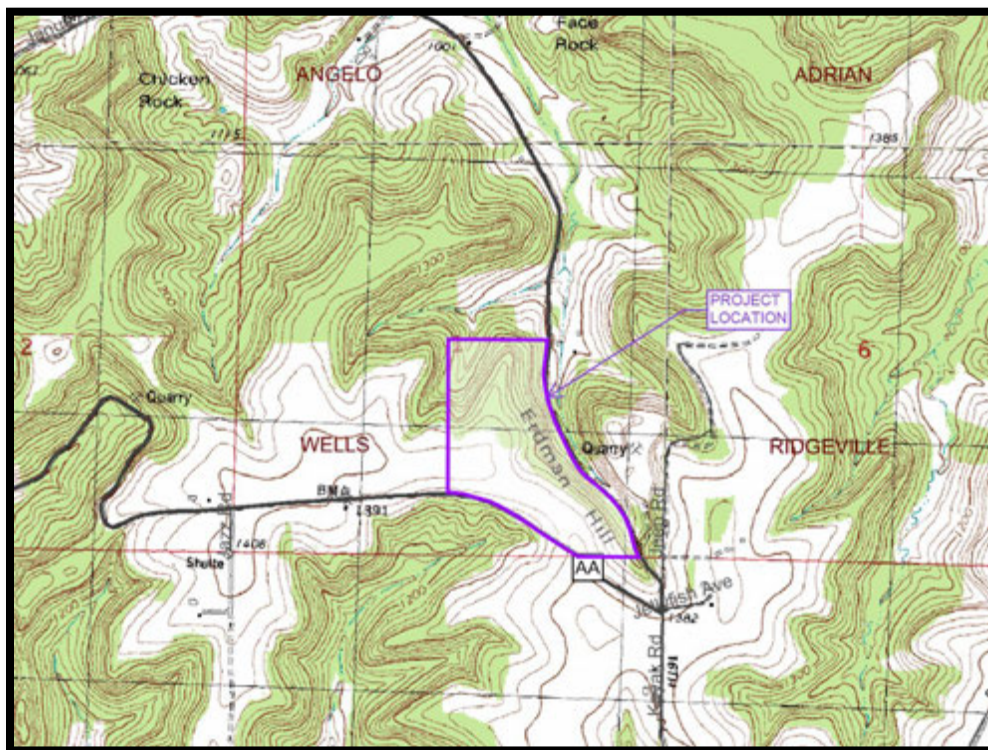

2.0 STATE AND LOCAL REQUIREMENTS

Section 2.1 below lists the state nonmetallic mining reclamation requirements; Section 2.2 below lists the local requirements and Section 2.3 is a listing of persons and/or entities receiving this document.

2.1 Wisconsin DNR Requirements (NR 135)

2.1.1 Surface Water and Wetland Protection

Nonmetallic mining reclamation shall be conducted and completed in a manner that assures compliance with water quality standards for surface waters and wetlands. Necessary measures for diversion and drainage of runoff from the site to prevent pollution of waters of the state shall be installed in accordance with the reclamation plan. Diverted or channelized runoff resulting from reclamation may not adversely affect neighboring properties.

2.1.2 Groundwater Protection

Nonmetallic mining site shall be reclaimed in a manner that does not cause a permanent lowering of the water table that results in adverse effects on surface waters, or a significant reduction in the quantity of groundwater reasonably available for future users of groundwater infiltration.

2.1.3 Topsoil Management

Removal of on-site topsoil material shall be performed prior any mining activity. Once removed, topsoil or topsoil substitute material shall either be used in contemporaneous reclamation or stored in an environmentally acceptable manner. The location of stockpiled topsoil or topsoil substitute material shall be chosen to protect the material from erosion or further disturbance or contamination. Runoff water shall be diverted around all locations in which topsoil or topsoil substitute material is stockpiled.

2.1.4 Final Grading and Slopes

Final grades and slopes shall provide for stable and safe conditions in the post mining land use. Final reclaimed slopes covered by topsoil or topsoil substitute material may not be steeper than a 3:1. When the post-mining land use includes a body of water, the approved final grade at the edge of a body of water shall extend vertically 6 feet below the lowest seasonal water level. A slope no steeper than 3:1 shall be created at a designated location or locations, depending on the size of the water body to allow for a safe exit.

2.1.5 Topsoil Redistribution for Reclamation

Topsoil or topsoil substitute material shall be redistributed in accordance with the approved reclamation plan in a manner which minimizes compaction and prevents erosion. Topsoil or topsoil substitute material shall be uniformly redistributed except where uniform redistribution is undesirable or impractical. Topsoil material redistribution may not be performed during or immediately after a precipitation event until the soils have sufficiently dried.

2.1.6 Revegetation and Site Stabilization

Except for permanent roads or similar surfaces, all surfaces affected by nonmetallic mining shall be reclaimed and stabilized by revegetation or other means. Revegetation and site stabilization shall be performed as soon as practicable after

mining activity has permanently ceased in any part of the mine site.

2.1.7 Assessing Completion of Successful Reclamation

The criteria for assessing when reclamation is complete and, therefore, when the financial assurance may be released shall be specified in the reclamation plan and shall be based on site inspection and report.

2.1.8 Maintenance

During the period of the site reclamation, after the operator has stated that reclamation is complete but prior to release of financial assurance, the operator shall perform any maintenance necessary to prevent erosion, sedimentation or environmental pollution.

2.2 Monroe County Nonmetallic Mining Ordinance

2.3 Submittal List

- Monroe County Land Conservation Department
c/o Bryce Richardson
Soil and Water Conservationist
Monroe County Land Conservation Dept
820 Industrial Drive Suite 3
Sparta, WI 54656
608-269-8976
Bryce.Richardson@co.monroe.wi.us

Other approving authorities will be copied as needed or requested.

3.0 RECLAMATION PLAN

3.1 Site Information.

The proposed mine will contain a limestone quarry located on 98.5 acres in Monroe County, Wisconsin. The operation will be located approximately 7 miles southeast of city of Sparta, WI. The mine is proposed to operate for 12-20 years allowing 1 to 3 years for reclamation.

Mining of the unconsolidated deposits will occur in three phases. Each separate phase is expected to be about 4-5 years. Reclamation will occur after completion of each of the mining phases as soon as is practical. Reclamation of one phase will be concurrent with mining of the successive phase.

Waste and overburden screens shall be stockpiled to provide a source of backfill material during final reclamation activities.

3.1.1 Legal Description:

Beginning at the SW Corner of the NW $\frac{1}{4}$ of the SE $\frac{1}{4}$ of Section 1. T16N, R3W, Town of Wells, Monroe County, WI, whose Northing is 359432.114 and whose Easting is 660779.334;

- thence bearing N 1-15-36.623 E a distance of 1306.451 ;
- thence bearing S 89-36-5.084 E a distance of 1193.900 ;

- thence bearing S 5-23-1.391 W a distance of 84.824 ;
- thence bearing N 89-2-10.656 W a distance of 8.304 ;
- thence along a curve to the LEFT, having a radius of 90.501 a delta angle of 69° 26' 12.02", and whose long chord bears S 56-14-43.336 W a distance of 103.089 ;
- thence bearing S 21-31-37.329 W a distance of 207.721 ;
- thence along a curve to the LEFT, having a radius of 556.965 a delta angle of 20° 22' 31.63", and whose long chord bears S 11-20-21.511 W a distance of 197.025 ;
- thence bearing S 1-9-5.694 W a distance of 439.595 ;
- thence along a curve to the RIGHT, having a radius of 203.373 a delta angle of 79° 19' 13.11", and whose long chord bears S 40-48-42.250 W a distance of 259.598 ;
- thence bearing S 80-28-18.806 W a distance of 230.551 ;
- thence bearing N 80-28-18.806 E a distance of 230.551 ;
- thence along a curve to the LEFT, having a radius of 203.373 a delta angle of 79° 19' 13.11", and whose long chord bears N 40-48-42.250 E a distance of 259.598 ;
- thence bearing N 1-9-5.694 E a distance of 439.595 ;
- thence along a curve to the RIGHT, having a radius of 556.965 a delta angle of 20° 22' 31.63", and whose long chord bears N 11-20-21.511 E a distance of 197.025 ;
- thence bearing N 21-31-37.329 E a distance of 207.721 ;
- thence along a curve to the RIGHT, having a radius of 90.501 a delta angle of 69° 26' 12.02", and whose long chord bears N 56-14-43.336 E a distance of 103.089 ;
- thence bearing S 89-2-10.656 E a distance of 8.304 ;
- thence bearing S 5-23-1.391 W a distance of 246.120 ;
- thence along a curve to the LEFT, having a radius of 767.464 a delta angle of 09° 24' 36.44", and whose long chord bears S 4-8-16.747 W a distance of 125.905 ;
- thence along a curve to the LEFT, having a radius of 751.867 a delta angle of 09° 36' 20.30", and whose long chord bears S 6-21-31.423 E a distance of 125.903 ;
- thence bearing S 14-19-21.551 E a distance of 141.409 ;
- thence bearing S 19-23-28.643 E a distance of 307.029 ;
- thence bearing S 1-9-0.064 W a distance of 298.875 ;
- thence bearing S 89-39-47.833 E a distance of 1327.356 ;
- thence bearing S 1-2-22.751 W a distance of 1303.517 ;
- thence bearing N 89-43-29.875 W a distance of 1006.720 ;
- thence bearing N 52-51-50.975 W a distance of 91.970 ;
- thence bearing N 54-15-2.590 W a distance of 91.970 ;
- thence bearing N 59-18-45.790 W a distance of 198.851 ;
- thence bearing N 57-37-49.316 W a distance of 349.404 ;
- thence bearing N 54-45-16.240 W a distance of 226.918 ;
- thence along a curve to the LEFT, having a radius of 1340.164 a delta angle of 04° 33' 29.28", and whose long chord bears N 58-35-50.703 W a distance of 106.588 ;
- thence bearing N 62-8-56.073 W a distance of 53.305 ;
- thence along a curve to the LEFT, having a radius of 2007.364 a delta angle of 16° 28' 50.77", and whose long chord bears N 74-39-38.555 W a distance of 575.417 ;
- thence bearing N 84-57-51.553 W a distance of 144.321 ;
- thence bearing N 1-15-36.788 E a distance of 540.122 to the point of beginning.

3.1.2 Property Boundary

Please see attached Maps A1 & B1.0

3.1.3 Aerial Extent

Map B1.0 illustrates how phasing will occur. Mining occurs in phases to minimize disturbance and erosion on the mining site as well as the amount of exposed soil at one time. Each phase corresponds to a specific excavation period where topsoil is removed and the pit is expanded.

There are three mining phases. Prior any rock extraction, topsoil shall be stripped and relocated to designated stockpile locations. Portions of this topsoil along with waste screens shall be used to reclaim areas excavated during the limestone/gravel excavation. Reclamation efforts shall commence upon completion of each phase as soon as practical. For more information on Phasing see Map B1.0.

3.1.4 Geologic Composition and Depth of Mineral Deposits

The site primarily features a ridge with wooded crest and side slope areas. The bedrock geology for this area is described as dolomite, limestone, sandstone, and shale. The dolomite and limestone are found above the level of the sandstone. The purpose of this quarry is to mine the dolomite and limestone to use as crushed aggregate in construction projects. Some sandstone may be disturbed in the mining process, but it is not the primary focus of this limestone quarry.

3.1.5 Distribution, Thickness and Type of Topsoil

A variety of soils occur in the area of the proposed mining site. A map delineating the soil types has been included in the reclamation plan (Map A9) along with the approximate pre-mining topography (Maps A3-A4). The primary soils encountered on the site are of silt loams nature and include Council silt loam (CnE); Norden, Urne, and Dorerton soils (NuF); Wildale cherty silt loam (WdC2 & WdD2); Wildale silt loam (WdB); and Valton-Wildale Silt Loams (VwE).

3.1.6 Groundwater Information

Wisconsin Geologic and Natural History Survey (WGNHS) provides an overview of the regional groundwater regime. Elevation of groundwater in the area proposed for the quarry is approximately 1070' or 280' depth from the existing topography (1350'). Please refer to Map A7 for the approximate elevation of groundwater.

The flow direction of groundwater is generally north-northwest towards Angelo. The mining operation will be conducted well above the groundwater table.

3.1.7 Location of Surface Waters

DNR surface water viewer depicts only intermittent streams near the proposed mining area. Reclaimed site topography will maintain the drainage pattern to the ephemeral streams generally draining to both sides of a ridgeline. For more details see Map A5.

3.1.8 Existing Topography

Existing topography has been generally represented on Maps A3 and A4, and more specific and localized on B1.0 and B1.1. Map B1.1 also shows the mining site in plan and profile after the reclamation is complete.

3.1.9 Locations of Manmade Features

Please refer to Map A1 which shows the existing site, and Map B1.0 which shows the mining site with the proposed manmade features. Proposed manmade features include access road, and stockpile locations.

3.2 Post Mining Land Use

Gerke Excavating shall return the site to a combination of post-mining land uses including wildlife habitat and prairie agricultural land or pastures. The proposed reclamation plan provides details and final land uses for the entire mining site. Generally, slopes shall be graded to 3:1 horizontal to vertical ratio or flatter. Rock faces may remain as exposed rock where practical.

Plant materials will be selected for reclamation based on the post-mining land use. Native species will be used to the extent practicable.

3.3 Reclamation Measures

3.3.1 Final Grades and Slopes

Gerke Excavating shall re-grade steep slopes and maintain 3:1 slopes or flatter where practical, to promote natural lines and blending contour lines to the undisturbed site topography. Mine operator shall use overburden screens and other clean material as backfill against vertical slopes. The proposed mining pit line follows existing topography for a majority of the boundary, thus having a more natural appearance.

All grading will be completed and resulting surfaces scarified prior to topsoil redistribution, Grading will be completed in a manner of preventing ponding of water on the reclaimed surfaces. The topsoil and subsoil will be placed and finished to the required lines, grades and slopes as shown on Map B1.1

3.3.2 Topsoil Management

Erosion control measures shall be installed prior any land disturbance activities. Trees, brush and other woody materials removed from the site during grubbing shall be shredded to mulch and stockpiled on site. These materials shall be used later in reclamation activities when possible. Large oversized materials or boulders shall be separated and used to control access to site and the construction of screening berms.

After completing erosion and sediment control measures and clearing and grubbing the site, but prior to commencing mining activities, the top soil and surficial plant growth material shall be removed. Topsoil horizon is estimated to vary between 3" and 12". In all cases top stripping shall be to a minimum of 6". Minor deviations may occur in the field as the site conditions demand.

Topsoil removal shall be accomplished by scrapers or bulldozers and haul trucks. When feasible, soil will be removed in a manner to minimize the surface area exposed to erosion at any given time.

All topsoil removed from the mining site shall be transported to the locations shown on Map B1.0. Topsoil from each phase shall be stockpiled at the eastern edge of the phase

boundary. This topsoil stockpile will be shaped into an elongated profile and shall be protected in a timely fashion from erosion through revegetation using the specified seed mix in Appendix B, page B2.0 or through use of mulch or other protective measures. Utilizing the specified seed mix will minimize completion with undesirable and aggressive weedy species. The elongated stockpile shall serve as a berm to aid in stormwater management.

Topsoil redistribution and site preparation shall be performed to achieve the final topography and drainage patterns as practicable once mining has ceased on a particular phase. All grading will be completed and the resulting surfaces scarified prior topsoil redistribution. This will promote good adherence and bonding between the subsoil and the topsoil and improve infiltration and drainage. Grading will be accomplished so to prevent ponding of water on the reclaimed surface. Topsoil shall be placed back to a depth of minimum 6 inches.

When compaction of soil is found to be too dense (access roads) to allow for suitable bond, the mining operator shall employ measures to rectify this condition such as disking, chisel plowing, ripping and or scarification. These measures will promote good bonding between the topsoil and underlying materials and will ensure suitable substrate for plant growth and the development of plant root system.

All topsoil shall be redistributed into a prepared site. Topsoil redistribution will be performed under dry conditions using appropriate equipment as to minimize compaction. Any clods or lumps present after the topsoil redistribution shall be broken down by the use of harrows, discs or other appropriate equipment in order to provide uniform textured soil.

3.3.3 Structures

Please refer to Map B1.0 for the locations of the access roads and stockpile locations. Any drainage and sediment control structures within the mining area shall be removed once the vegetative cover is sufficiently established to provide equivalent protection.

3.3.4 Revegetation Plan

The revegetation plan includes all activities in support of selecting, obtaining, handling and applying seed or otherwise installing plant materials to fulfill the reclamation plan. Seed and plant materials will be obtained from a licensed nursery that normally works with native prairie and/or wetland plant materials. Seed shall be free of contamination by weedy species.

Seed selection shall be based on the reclamation land use (See Appendix B, Page B2.0):
Mix-2 Wildlife/Grazing

Reclaimed areas shall be seeded only after soils have been properly prepared as specified above. Seeding shall be done at any time during the growing season when soil conditions are suitable except between July 1 and August 15, unless permitted by the county representative. Seeding activities will not be carried out immediately following rain, when the ground is too dry or during windy periods. Care will be taken to follow the instructions that are provided by the supplier.

General seeding methods include:

Broadcast Seeding Using Agricultural Equipment applicable for agricultural land use and wildlife/passive recreation. Seeding activities will be carried out using specified equipment

and in a manner to avoid soil compaction. The area seeded will not exceed the area that can be mulched on the same day. Seed will be uniformly sown by means of equipment adapted to the purpose. Then the site will be lightly raked or dragged to cover the seed with approximately one-fourth inch of soil. After seeding is complete, the areas will be lightly rolled or compacted by means of suitable equipment to improve seed to soil contact and germination.

Following seeding, mulch will be applied uniformly at a rate of between 1 and 1.5 tons per acre. Mulch will be wheat straw, marsh hay or equivalent weed-free mulch. Mulching operations will begin at the top of the slope and proceed downward. The mulch cover will be applied so as to be loose enough to allow some sunlight to penetrate yet thick enough to provide shade and protection from desiccation and raindrop impact and erosion. After spreading on reseeded surfaces mulch will be crimped into the soil by passing over the reclaimed surface with a dull, weighted disk or similar implement. On steep slopes straw or hay mulch will be securely pegged or stapled in place. In lieu of such anchorage, the mulch may be secured by means of heavy biodegradable twine fastened with pegs or staples to form a grid. Also, at the discretion of the project manager erosion blanket, jute netting or a tactifier may be used in addition to or in lieu of the crimping process.

3.3.5 Revegetation Standards

The purpose of establishing clear revegetation surface criteria is necessary to provide a reference point to evaluate the success of the reclamation operation in an objective manner. Suggested revegetation standards are listed below:

Post mining Land Use and Success criteria Table

Post Mining Land Use	Seed Mix	Stage Phase	Success Criteria	Years to Show
Wildlife	#2	Final Reclamation	70% cover	2

Percent cover shall be determined by estimating the percentage of an area covered by vegetation and a predictor of site stability. A typical standard for percent cover is 70% cover (primarily leaf and stem area) averaged over the site at 90 percent statistical confidence level. Count may be physical and photos shall be provided. The measurement of cover should be timed to correspond with the period of peak vegetative growth, generally in early-mid August.

Upon completion of reclamation activities, whether this includes a portion of the site or the entire mining site, the Monroe County Land Conservation Specialist or other relevant regulatory authority shall inspect the site in order to verify success of reclamation.

3.3.6 Erosion Control

The main purpose of a general erosion control plan is to minimize erosion and limit the potential for sediment run-off into surface waters. Erosion control measures will be established prior to any site development activities including topsoil removal and stockpiling. Erosion control measures will be also established prior to initiating reclamation such as contemporaneous reclamation, backfilling or grading. Typical erosion control measures are shown on Map B1.2 and B1.3. Due to the nature of mining, a vast amount of the water will pond and infiltrate within the boundaries of the site. However, perimeter

controls to combat the potential for erosion will be employed throughout the duration of the mining and reclamation activities.

3.3.7 Site Maintenance

Mining operator shall inspect the sediment and erosion control systems on a regular basis and immediately after severe storms. Periodic follow-up inspections of all reclaimed or otherwise stabilized surfaces shall be performed to ensure they are in a condition stable enough to control erosion and sedimentation. When damage caused by traffic, wind, water or other cause is detected the mining operator will promptly perform all necessary maintenance and repair work to the erosion control system. Likewise, other work necessary to ensure long term success of the vegetation including follow-up fertilization, necessary soil amendments or any weed or pest control will be accomplished.

As part of maintenance of the reclaimed site, Gerke Excavating will perform any necessary weed control or pest control and maintenance both to facilitate the establishment and survival of vegetation. Exotic species that occur on the site or are accidentally added though contaminants in the seed mixes or through the use of hay or other mulch products that are not weed free will be promptly controlled through fire, mechanical means or with herbicides. This is especially true when the species appears on the list of state noxious weeds. This will continue until the Monroe County Land Conservation Office issues the certificate of completion (COC).

3.4 Criteria for Successful Reclamation

Gerke Excavating shall demonstrate compliance with the revegetation success standards (performance standards) for each post-mining land use contained in the reclamation plan. The techniques employed are as follows: percent cover will be determined as total cover (expressed as a percentage) as measured by coverage of the canopy (vertical projection of plant parts) and will be recorded by species. Cover will be measured over the entire re-vegetated site at no less than 20 randomly placed 10 square feet quadrats for each 10 acre area. Success criteria will vary with the post-mining land use. In addition, both presence (a species list) and frequency (number of quadrats the species occurs in) will be included.

3.5 Certification of the Reclamation Plan

Certification is included within the Monroe County Application for Reclamation Permit for New or Reopened Nonmetallic Mining Sites. Please see Appendix C

3.6 Final Site Actions

The final removal of mining-related structures, drainage structures and sediment control structures will be accomplished once the vegetative cover is robust enough to provide equivalent protection. At such time and in accordance with the approved reclamation plan those structures will be removed and the soils in such areas will be reclaimed. At this time Gerke Excavating shall request the Monroe County Land Conservation Department to perform the necessary inspection and evaluation work to certify the reclamation as complete (COC) and to release the financial assurance.

3.7 Certification of the Reclamation Plan

I hereby certify, as a duly authorized representative or agent, that Gerke Excavating, Inc., shall comply with the provisions of this reclamation plan as well as the statewide nonmetallic mining reclamation standards established in ss. NR 135.05 through NR 135.15, Wis. Adm. Code.

Signature of Applicant or Duly Authorized Agent

Date Signed

Owner and/or Lessee: Gerke Excavating, Inc. (Same as above)

3.8 Financial Assurance

The objective of financial assurance is to ensure that the Monroe County Land Conservation Department has access to funds necessary to implement site reclamation in the event that the operator does not perform the agreed upon duties. The funds shall accurately reflect the cost for the regulatory authority to hire outside help to perform reclamation. The main purpose of financial assurance is to ensure that the operator will faithfully execute the requirements of the approved reclamation plan, the applicable reclamation ordinance and Ch. NR 135.


- Gerke Excavating, is estimating **\$2,500.00 per acre** for reclamation purposes.
- The total amount of financial assurance shall be based on the actual disturbed acreages of land and not on the overall mining area.
- The length of the financial assurance is dictated by the period of time required to establish the post mining land use specified in the mine reclamation plan.
- Any interest from the financial assurance shall be paid to the operator per NR 135.40(4)
- The amount of financial assurance is reviewed periodically by the Monroe County Land Conservation Department to assure it equals outstanding reclamation costs.
- Upon approval the proposed amount, the mining operator shall establish a bond, net worth test, escrow account or an alternate option to cover the financial assurance.

APPENDIX A


General Maps and Additional Information

MONROE COUNTY PARCEL MAP

Printed From Monroe County GIS Website - June 5, 2013

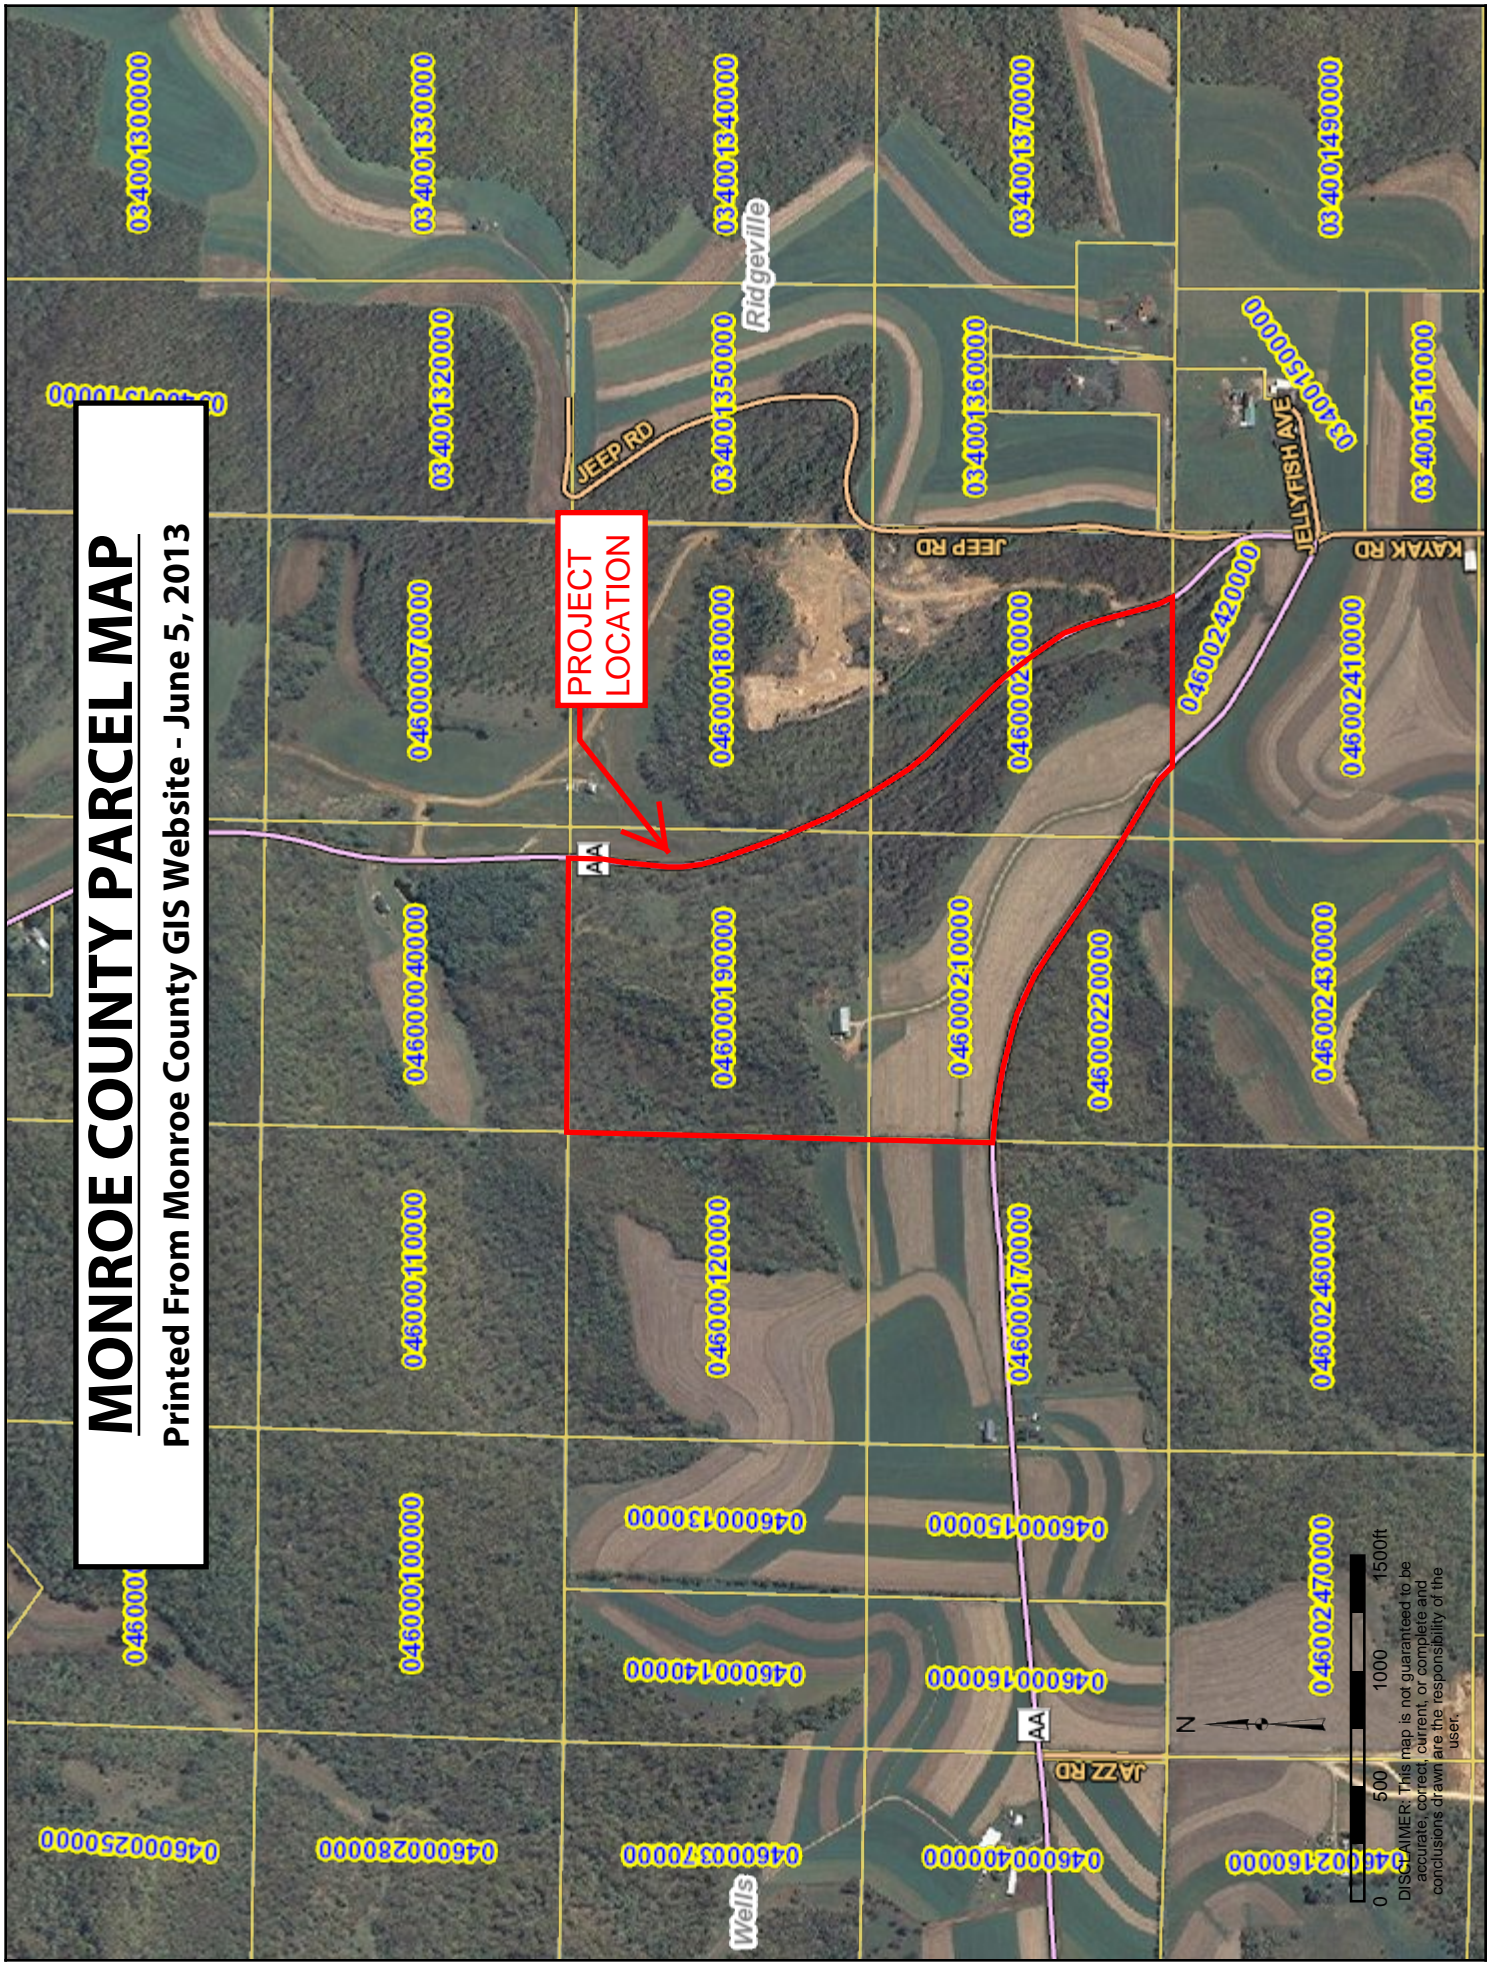


PROJECT
LOCATION



DISCLAIMER: This map is not guaranteed to be accurate, correct, current, or complete and conclusions drawn are the responsibility of the user.


SURROUNDING LAND USES

Aerial and Parcels with County Zoning Designations

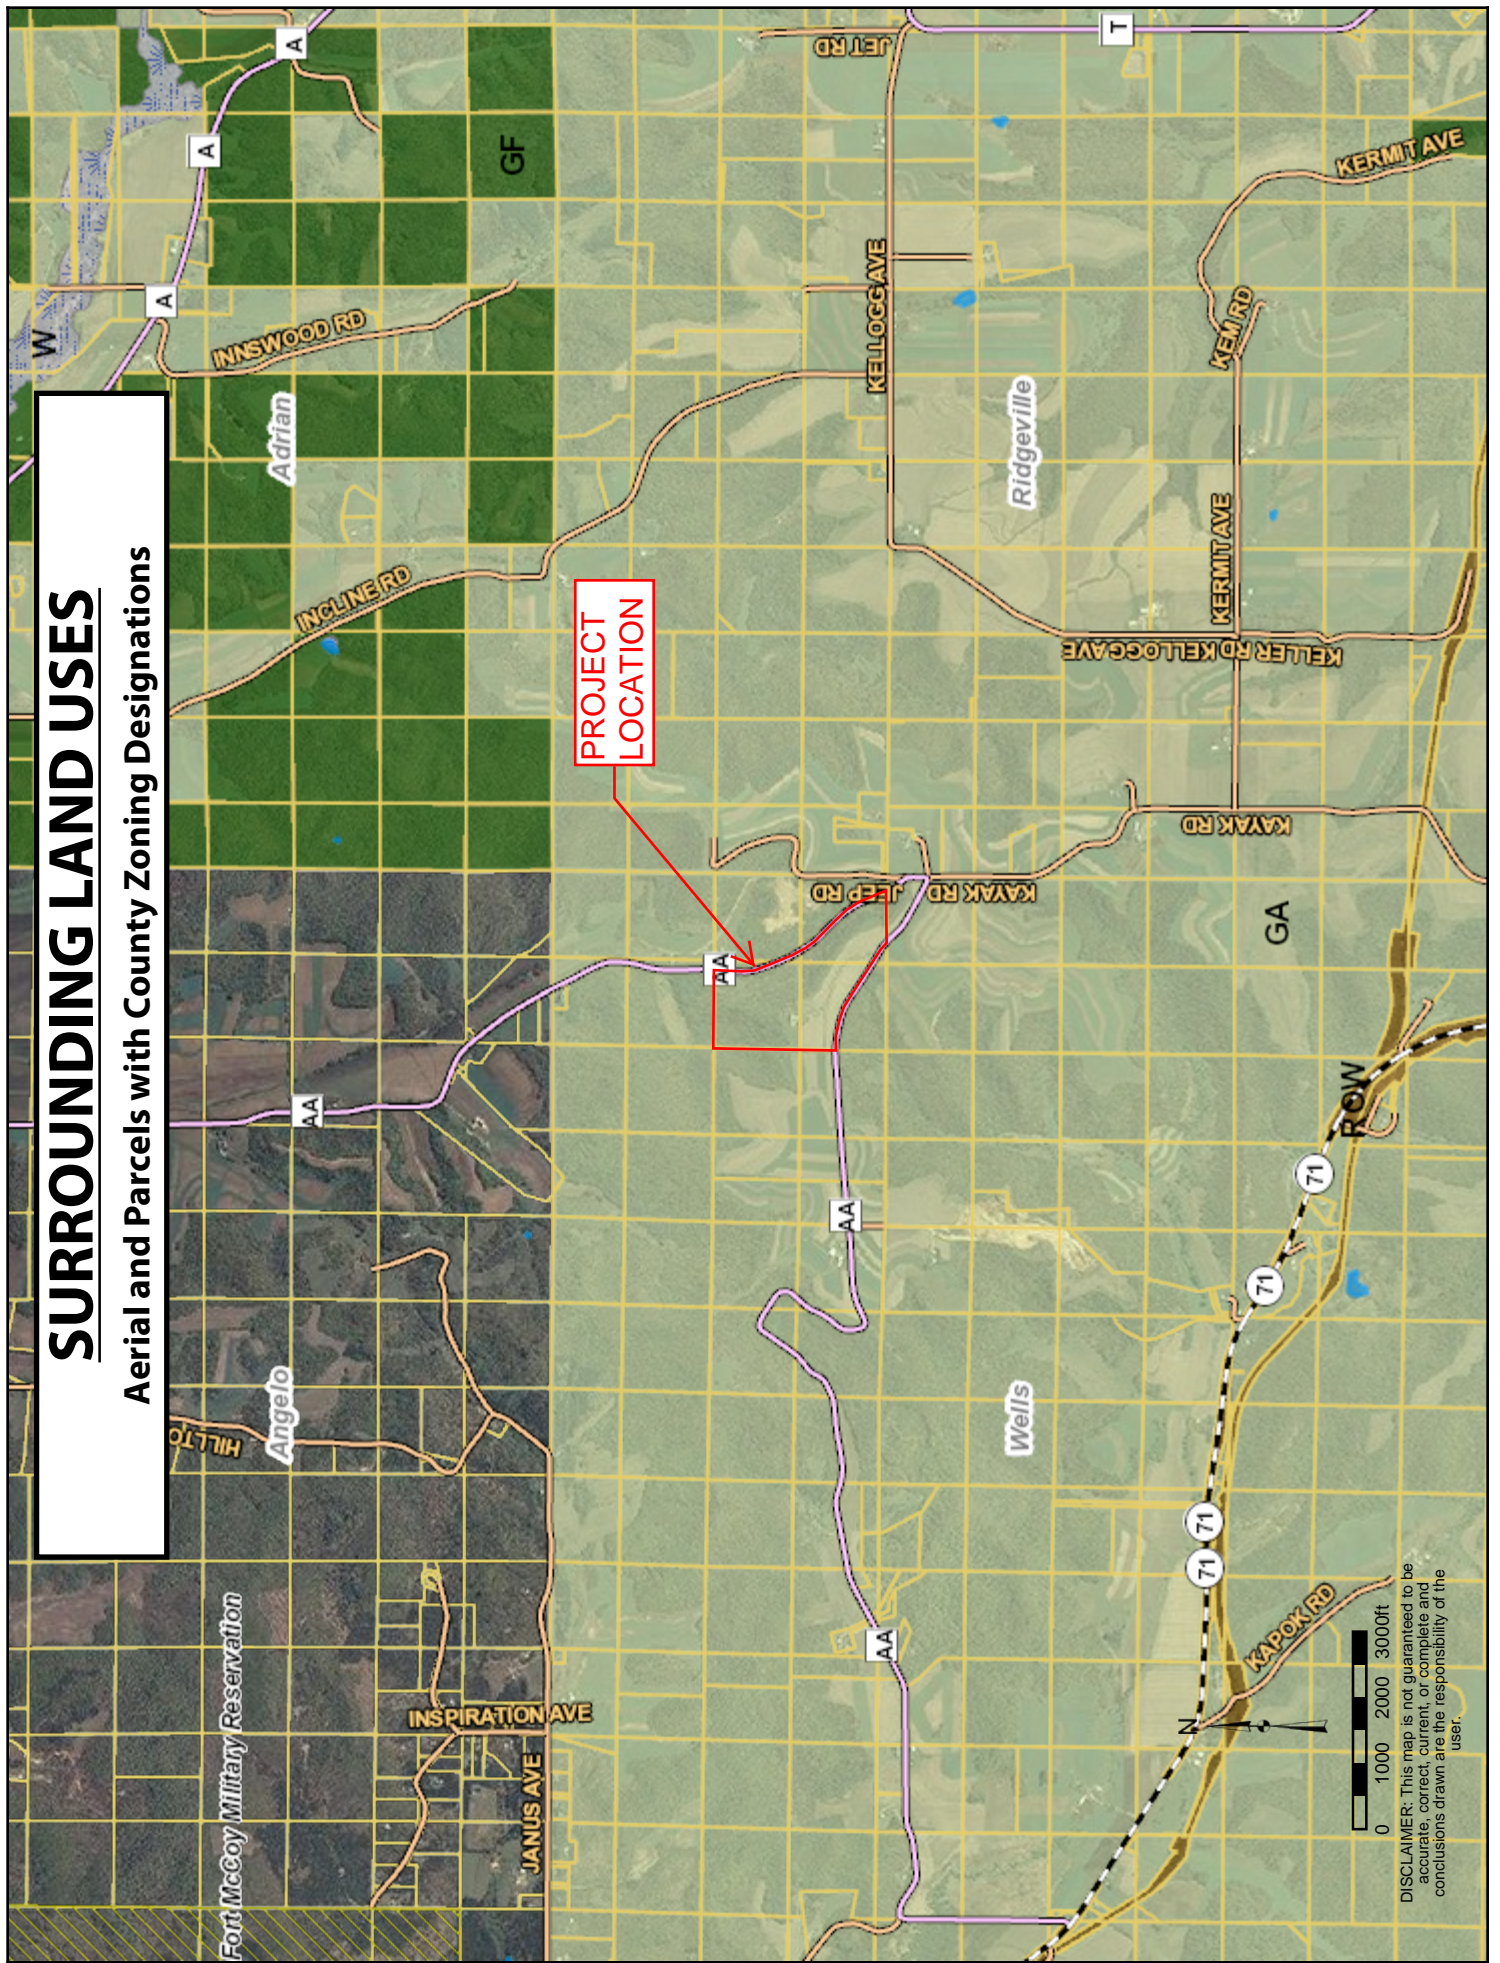



0 1000 2000 3000ft
DISCLAIMER: This map is not guaranteed to be accurate, correct, current, or complete and conclusions drawn are the responsibility of the user.

USGS Topographic Map

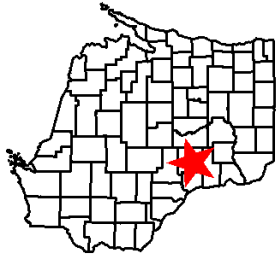

Legend

- Major Highways**
- Interstate
 - State Highway
 - U.S. Highways
 - County Roads
 - Local Roads
- Civil Towns**
- Civil Town

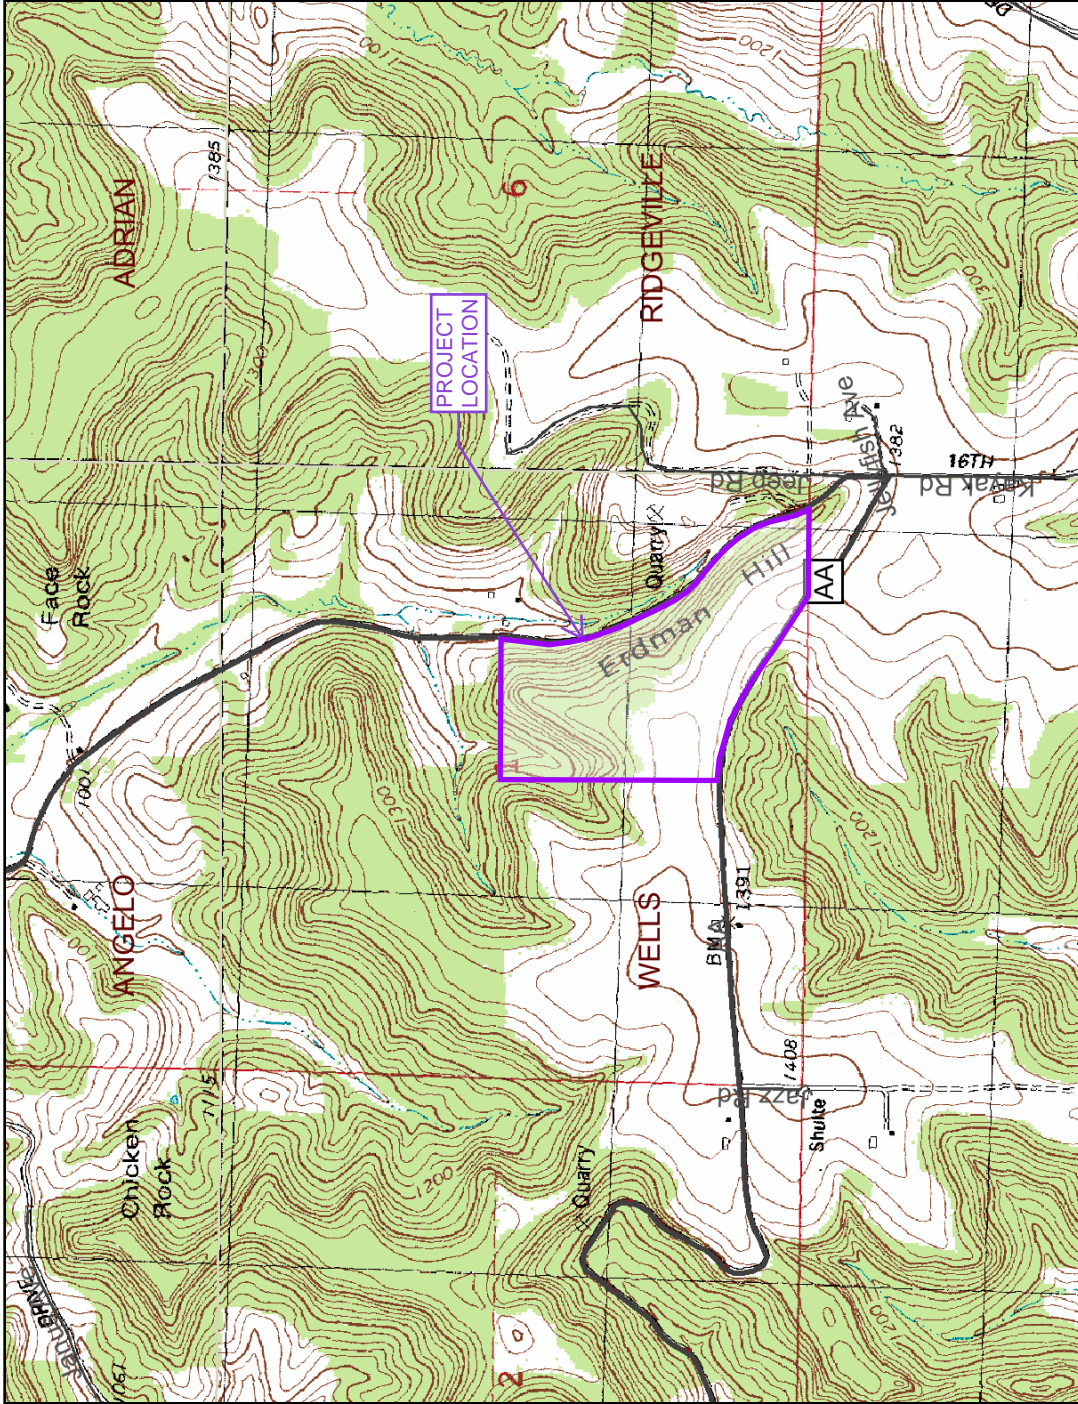

This map is a user generated static output from an Internet mapping site and is for general reference only. Data layers that appear on this map may or may not be accurate, current, or otherwise reliable. THIS MAP IS NOT TO BE USED FOR NAVIGATION.


USGS Topographic Map With Aerial



Legend

- Major Highways
 - Interstate
 - State Highway
 - U.S. Highways
- County Roads
- Local Roads
- Civil Towns
- Civil Town


Scale: 1:20,000

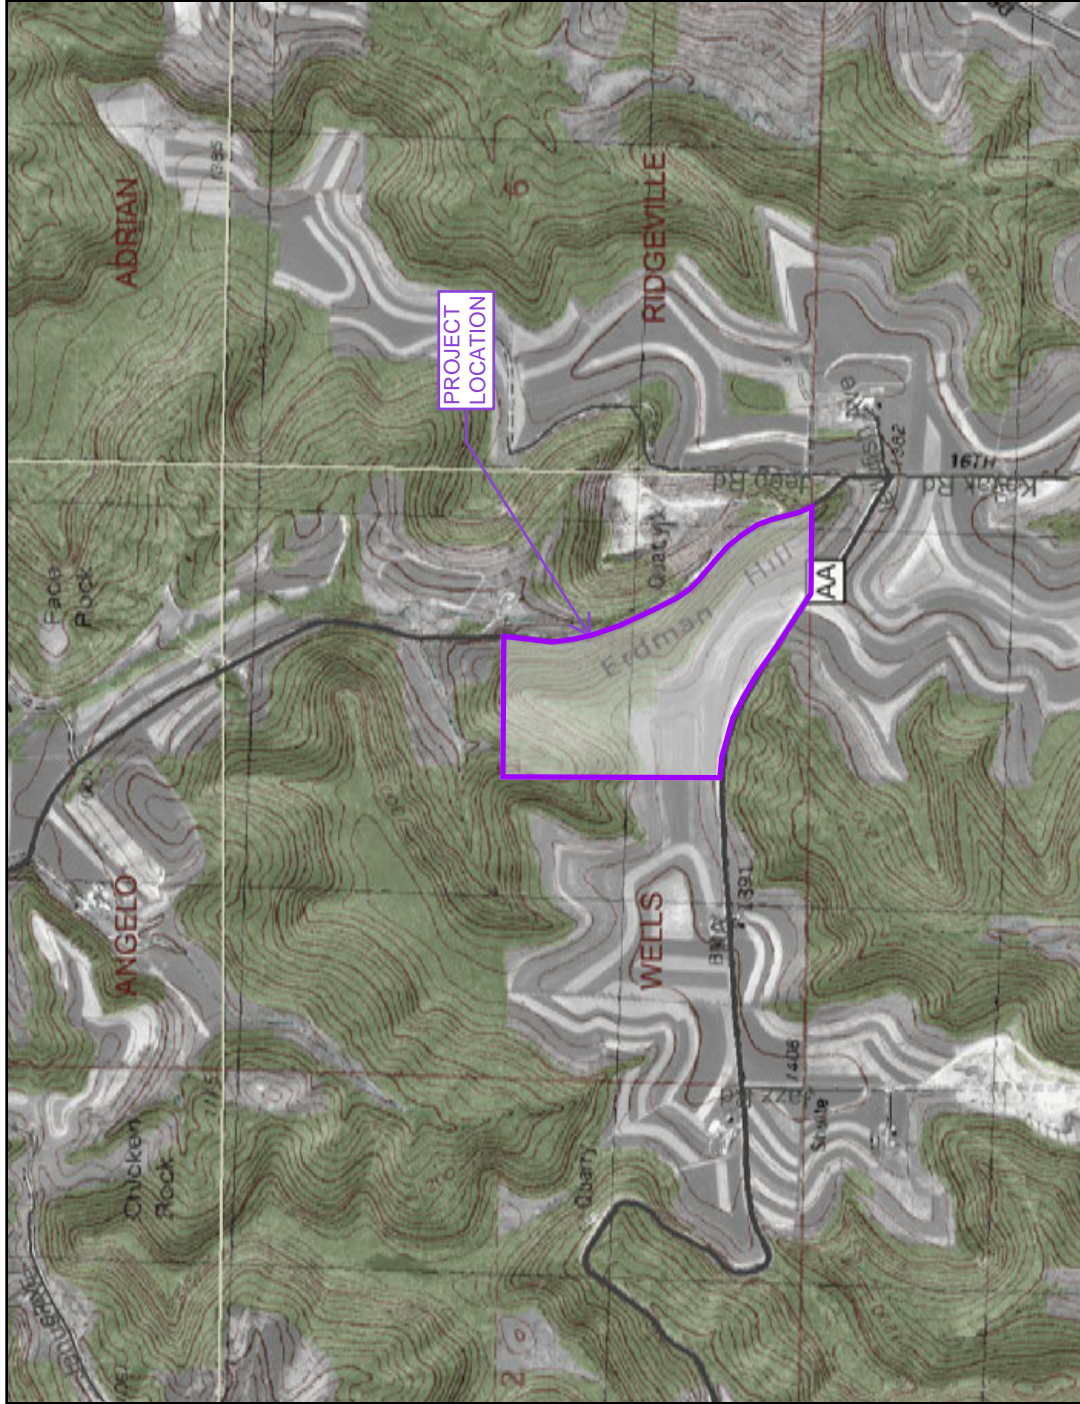


0 2000 4000 6000 ft.

This map is a user generated static output from an Internet mapping site and is for general reference only. Data layers that appear on this map may or may not be accurate, current, or otherwise reliable. THIS MAP IS NOT TO BE USED FOR NAVIGATION.

Surface Waters, Wetlands, and Floodplains

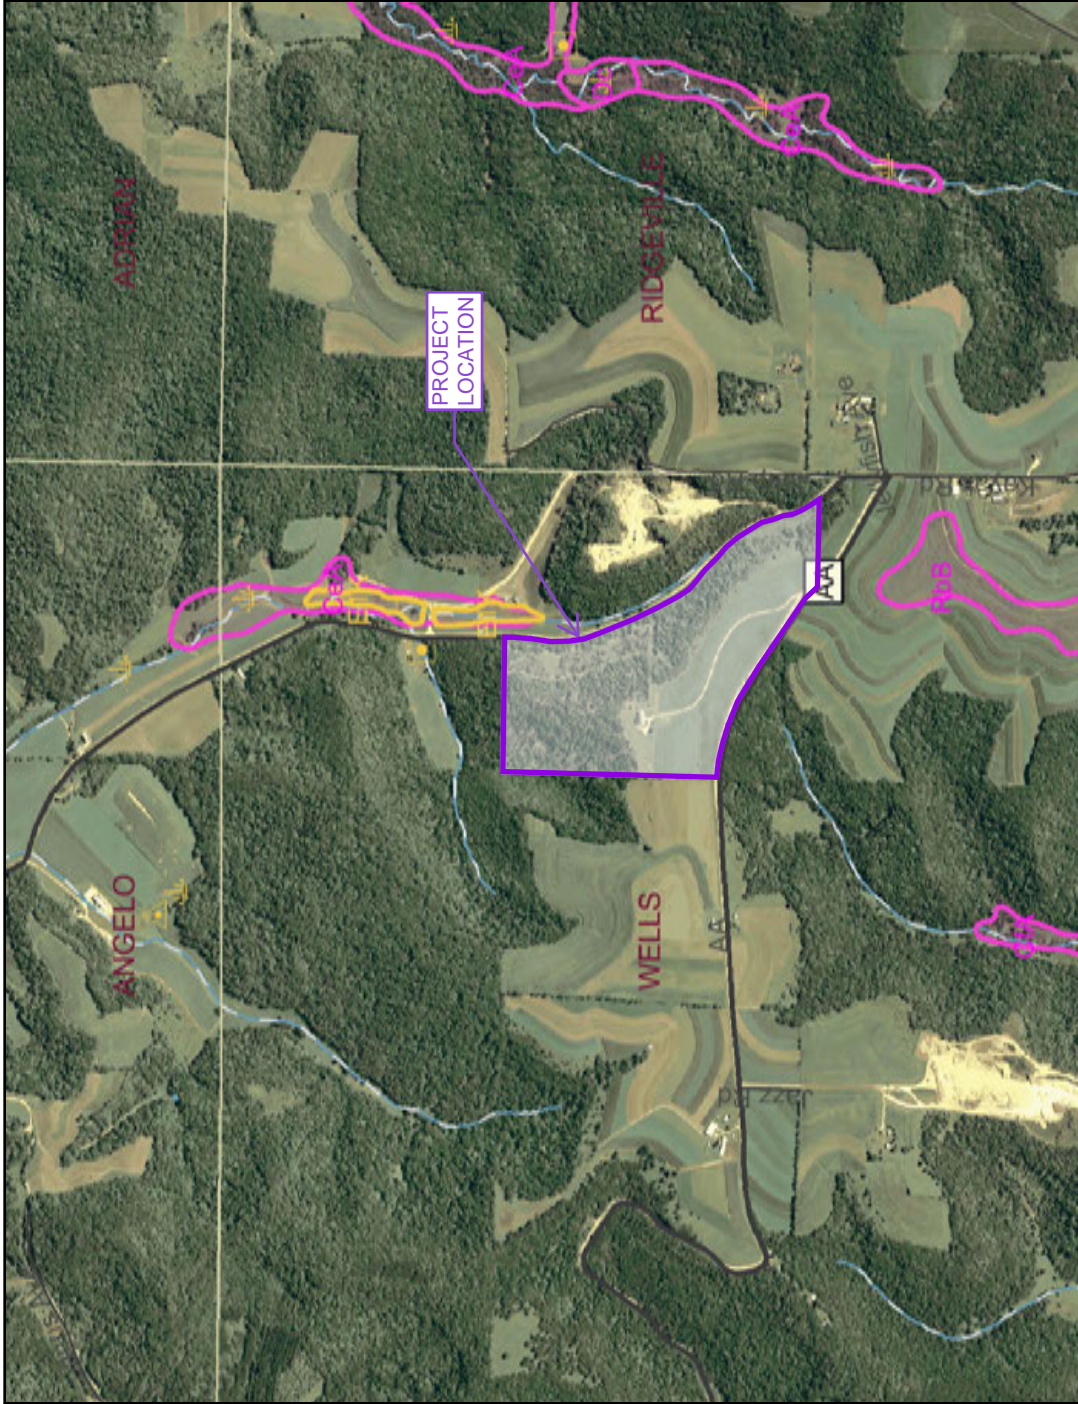

This map is a user generated static output from an Internet mapping site and is for general reference only. Data layers that appear on this map may or may not be accurate, current, or otherwise reliable. THIS MAP IS NOT TO BE USED FOR NAVIGATION.

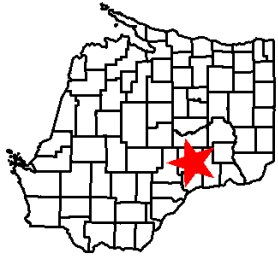


Legend

- Major Highways**
 - Interstate
 - State Highway
 - U.S. Highways
 - County Roads
 - Local Roads
- Civil Towns**
- Digital Flood Boundaries**
 - 100 Year Floodplain
 - 500 Year Floodplain
 - Floodway
- USDA Wetspots**
- DNR Wetland Points**
 - Excavated Pond
 - Dammed Pond
 - Wetland Too Small to Delineate
 - Filled Excavated Pond
 - Filled Dammed Pond
 - Filled Wetland Too Small to Delineate
 - Filled or Drained Wetland
- DNR Wetland Areas**
 - Upland
 - Wetland
 - Filled or Drained Wetland
- Wetland Indicator Soils**
- 24K Open Water**
- 24K Rivers and Shorelines**
 - Intermittent
 - Fluctuating
 - Perennial



Scale: 1:20,000

WISC Land Cover

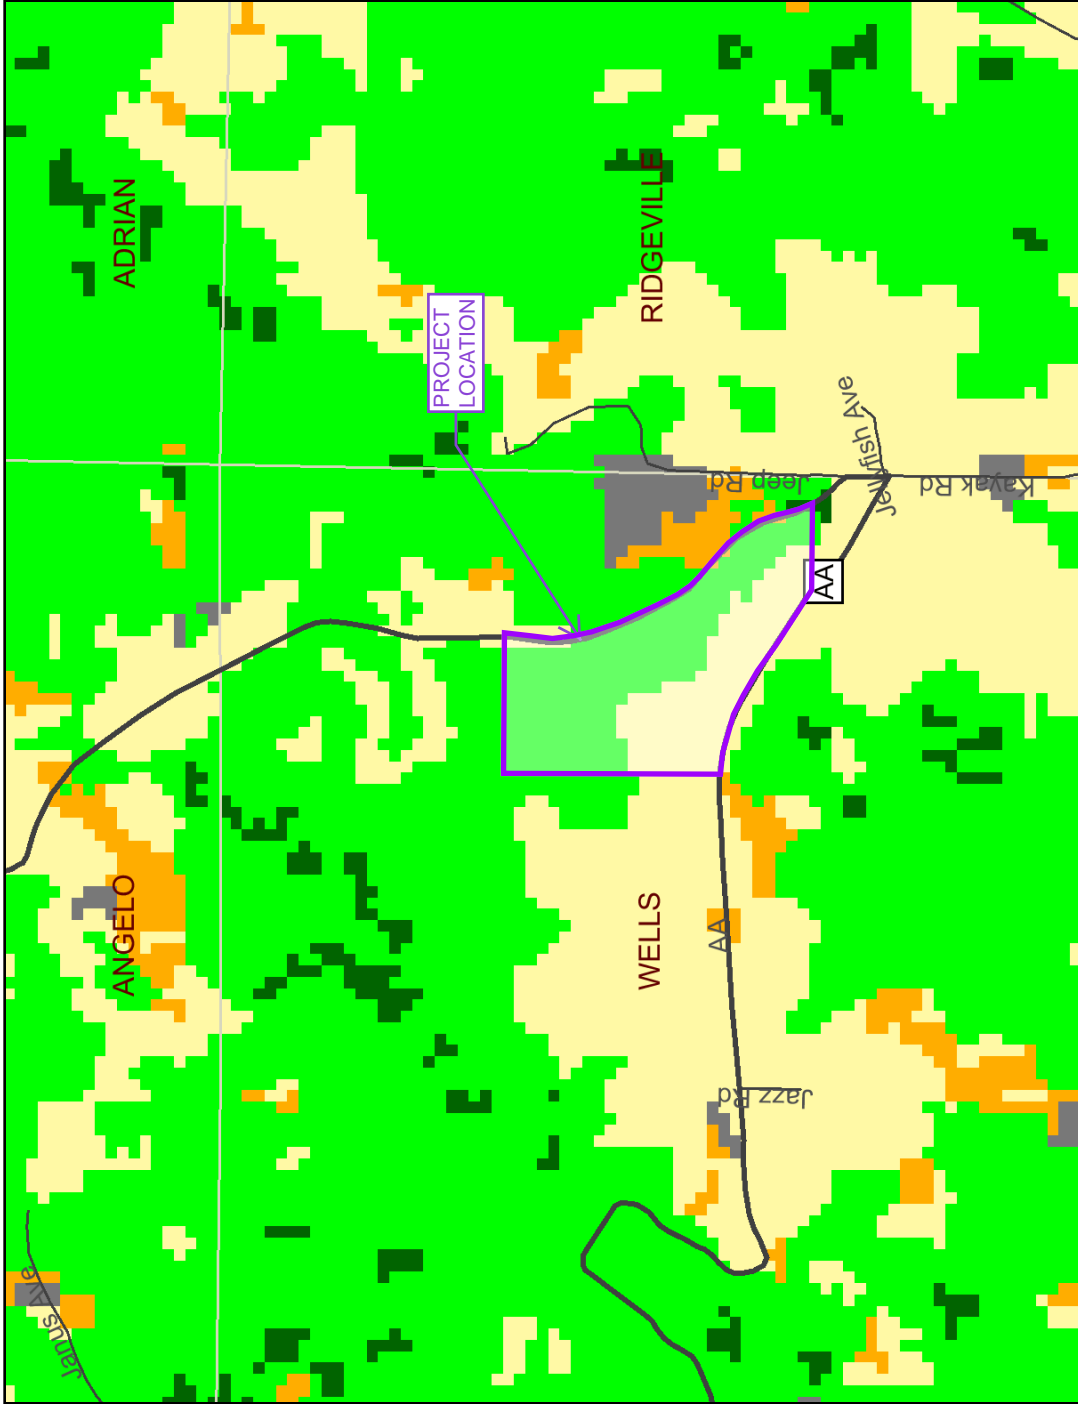


Scale: 1:20,000

Legend

- Major Highways**
 - Interstate
 - State Highway
 - U.S. Highways
 - County Roads
 - Local Roads
- Civil Towns**
 - Civil Town
- WISCLAND Landcover**
 - High Intensity Urban
 - Low Intensity Urban
 - Golf Course
 - General Agriculture
 - Cranberry Bog
 - Grassland
 - Coniferous Forest
 - Broad-leaved Deciduous Forest
 - Mixed Deciduous-Coniferous Forest
 - Open Water
 - Emergent-Wet Meadow Wetland
 - Lowland Shrub Wetland
 - Forested Wetland
 - Barren
 - Shrubland
 - Cloud Cover
 - Other



This map is a user generated static output from an Internet mapping site and is for general reference only. Data layers that appear on this map may or may not be accurate, current, or otherwise reliable. THIS MAP IS NOT TO BE USED FOR NAVIGATION.

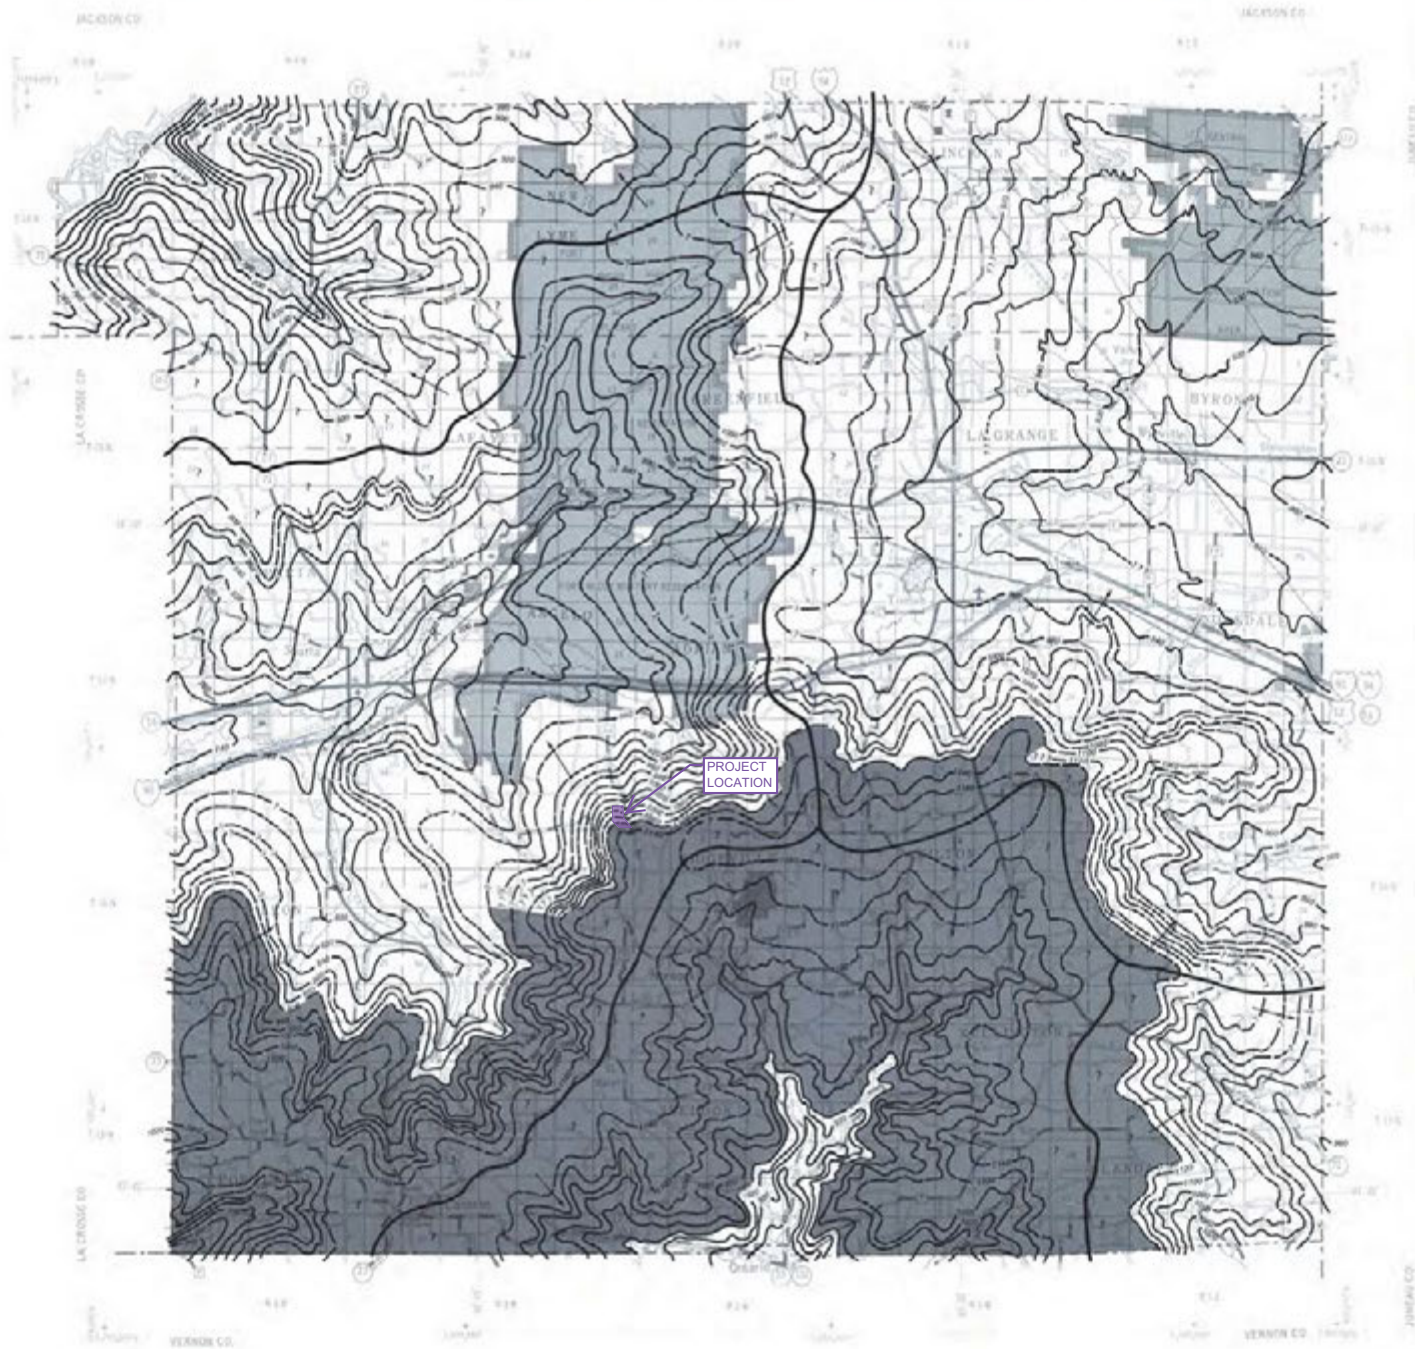

WATER TABLE ELEVATION

IRRIGABLE LANDS INVENTORY

PHASE I - GROUND WATER AND RELATED INFORMATION

By:

I.D. LIPPELT

Prepared by:

WISCONSIN GEOLOGICAL AND NATURAL HISTORY SURVEY

Sponsored by:

GOLDEN SANDS RESOURCE CONSERVATION AND DEVELOPMENT AREA

Funded by:

UPPER GREAT LAKES REGIONAL PLANNING COMMISSION

SEPTEMBER 1981

EXPLANATION

- Elevation of water table, 20 ft. interval
Datum is mean sea level
- Area with 40 ft. interval
- Probable location of water table
- - - - - Inferred location of water table
- 7 Location of water table unknown, insufficient data
- Half interval, 10 ft.
- Direction of ground-water movement
- Ground-water divide, approximate location
- Probable ground-water divide
- Federal/State lands

Data have not been field checked.



SOURCES

- (a) Soil Conservation Service (1955-1975) - Wisconsin Department of Natural Resources
- (b) Published and unpublished Geologic Logs (1956-present) - Wisconsin Geological & Natural History Survey
- (c) USGS Topographic Maps
- (d) Water level observation wells from the Ground Water Level Monitoring Network operated and maintained by Wisconsin Geological and Natural History Survey and USGS
- (e) Monroe County Land Atlas and Plat Book, 1980, Rockford Map Publishers, Inc.


MONROE CO.
DEPARTMENT OF TRANSPORTATION

SCALE 1:50,000

BEDROCK GEOLOGY OF WISCONSIN


UNIVERSITY OF WISCONSIN—EXTENSION
Geological and Natural History Survey

APRIL 1981
 REVISED 2005

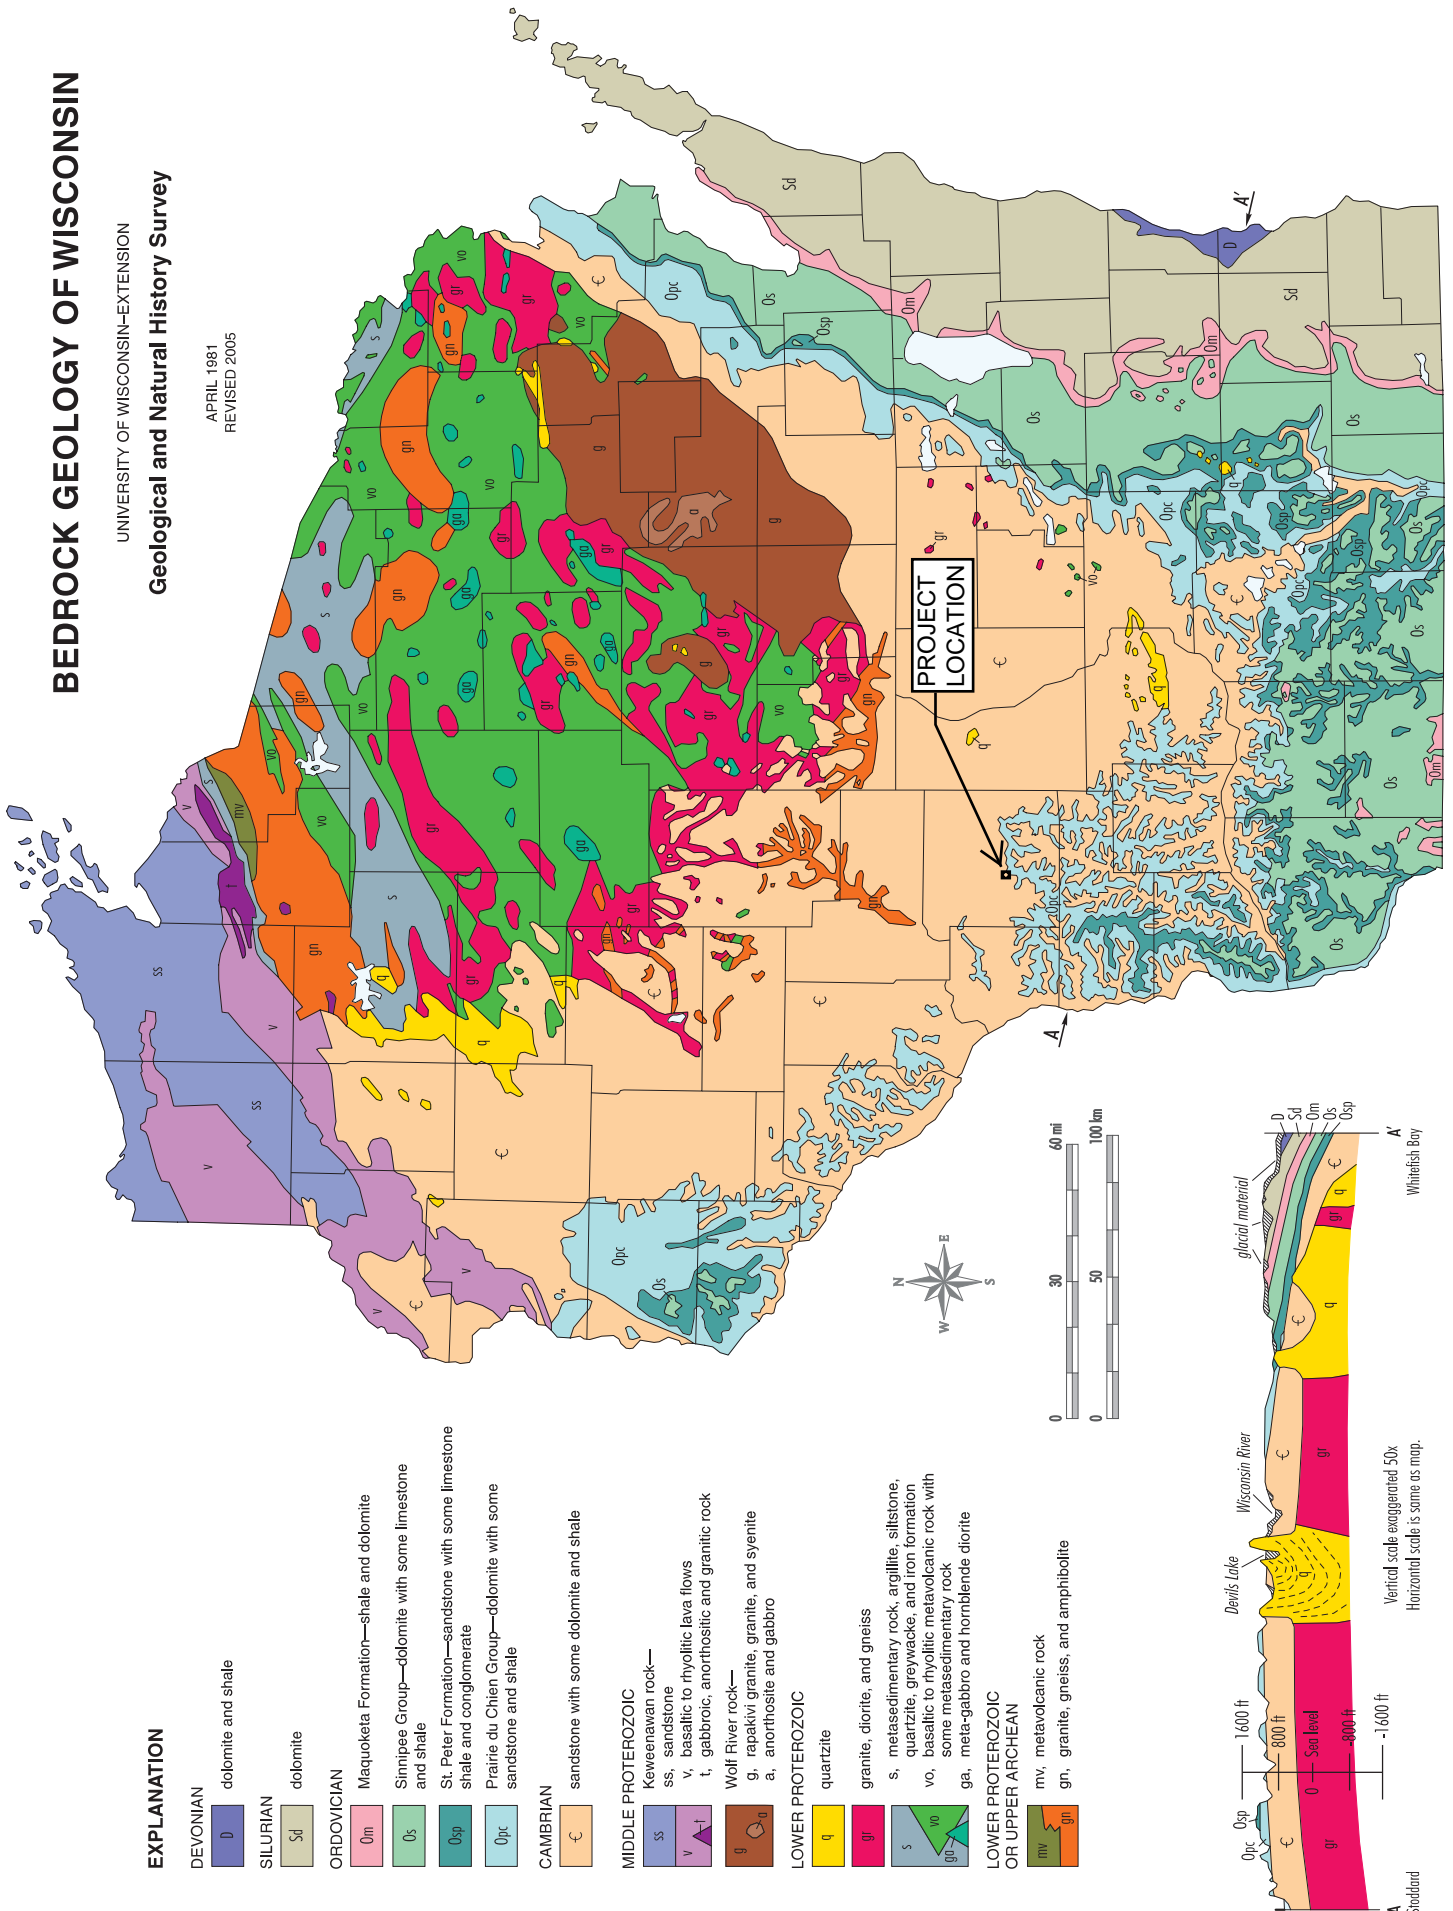


EXPLANATION

- DEVONIAN**
 D dolomite and shale
- SILURIAN**
 Sd dolomite
- ORDOVICIAN**
 Om Maquoketa Formation—shale and dolomite
 Os Sinipee Group—dolomite with some limestone and shale
 Osp St. Peter Formation—sandstone with some limestone shale and conglomerate
 Oprc Prairie du Chien Group—dolomite with some sandstone and shale
- CAMBRIAN**
 C sandstone with some dolomite and shale
- MIDDLE PROTEROZOIC**
 ss Keweenaw rock—sandstone
 v, v+ basaltic to rhyolitic lava flows
 t, t+ gabbroic, anorthositic and granitic rock
 Wolf River rock—g, rapakivi granite, granite, and syenite
 a, anorthosite and gabbro
- LOWER PROTEROZOIC**
 q quartzite
 g granite, diorite, and gneiss
 s, s+ metamorphic rock, argillite, siltstone, quartzite, greywacke, and iron formation
 vo, vo+ basaltic to rhyolitic metavolcanic rock with some metamorphic rock
 ga, ga+ meta-gabbro and hornblende diorite
- LOWER PROTEROZOIC OR UPPER ARCHEAN**
 mv, mv+ metavolcanic rock
 gn, gn+ granite, gneiss, and amphibolite

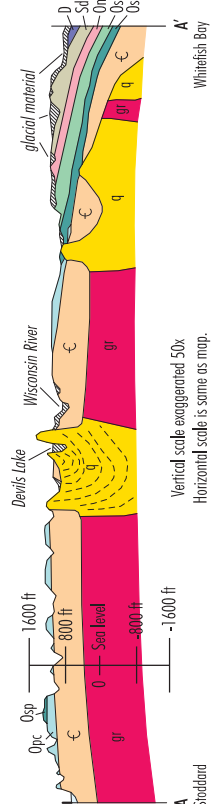

Vertical scale exaggerated 50x
 Horizontal scale is same as map.

Map Unit Name—Monroe County, Wisconsin
(Gerke Excavating Limestone Quarry)

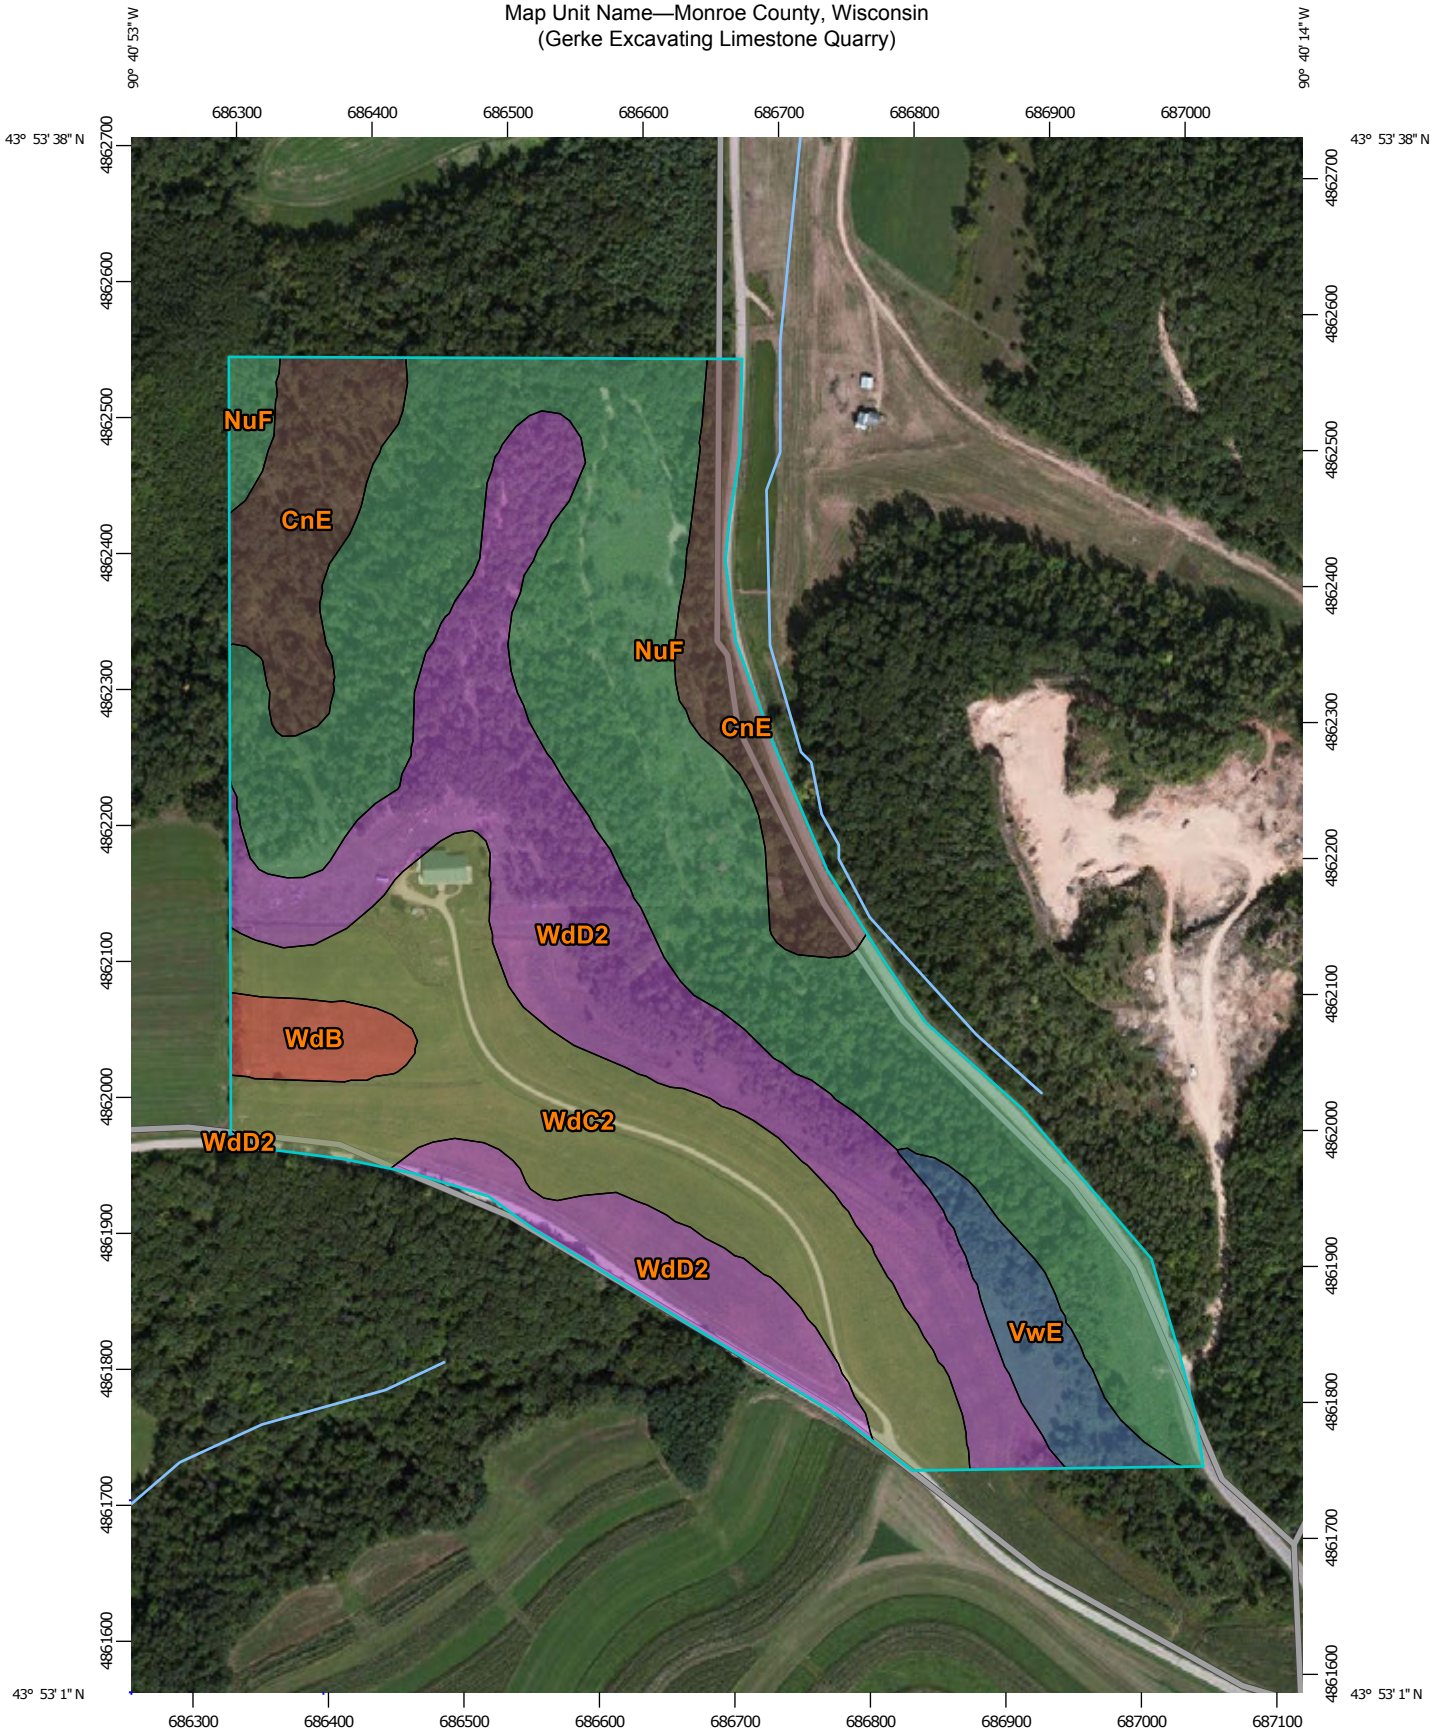

Map Scale: 1:5,570 if printed on A portrait (8.5" x 11") sheet.
0 50 100 200 300 Meters
0 250 500 1000 1500 Feet
Map projection: Web Mercator Corner coordinates: WGS84 Edge tics: UTM Zone 15N WGS84

MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:15,800.

Warning: Soil Map may not be valid at this scale.

Enlargement of maps beyond the scale of mapping can cause misunderstanding of the detail of mapping and accuracy of soil line placement. The maps do not show the small areas of contrasting soils that could have been shown at a more detailed scale.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service
Web Soil Survey URL: <http://websoilsurvey.nrcs.usda.gov>
Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: Monroe County, Wisconsin
Survey Area Data: Version 7, May 13, 2009


Soil map units are labeled (as space allows) for map scales 1:50,000 or larger.

Date(s) aerial images were photographed: Aug 25, 2011—Oct 2, 2011

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.








MAP LEGEND

Area of Interest (AOI)



 Area of Interest (AOI)


Soils

Soil Rating Polygons






-  Council silt loam, 20 to 30 percent slopes
-  Norden, Urne, and Dorerton soils, 20 to 45 percent slopes
-  Valton-Wildale silt loams, 20 to 45 percent slopes
-  Wildale cherty silt loam, 12 to 20 percent slopes, eroded
-  Wildale cherty silt loam, 6 to 12 percent slopes, eroded
-  Wildale silt loam, 2 to 6 percent slopes
-  Not rated or not available



Soil Rating Lines

-  Council silt loam, 20 to 30 percent slopes
-  Norden, Urne, and Dorerton soils, 20 to 45 percent slopes


-  Valton-Wildale silt loams, 20 to 45 percent slopes
-  Wildale cherty silt loam, 12 to 20 percent slopes, eroded
-  Wildale cherty silt loam, 6 to 12 percent slopes, eroded
-  Wildale silt loam, 2 to 6 percent slopes
-  Not rated or not available

Soil Rating Points






-  Council silt loam, 20 to 30 percent slopes
-  Norden, Urne, and Dorerton soils, 20 to 45 percent slopes
-  Valton-Wildale silt loams, 20 to 45 percent slopes
-  Wildale cherty silt loam, 12 to 20 percent slopes, eroded
-  Wildale cherty silt loam, 6 to 12 percent slopes, eroded

-  Wildale silt loam, 2 to 6 percent slopes
-  Not rated or not available

Water Features

 Streams and Canals

Transportation

-  Rails
-  Interstate Highways
-  US Routes
-  Major Roads
-  Local Roads

Background

 Aerial Photography

Map Unit Name

Map Unit Name— Summary by Map Unit — Monroe County, Wisconsin (WI081)				
Map unit symbol	Map unit name	Rating	Acres in AOI	Percent of AOI
CnE	Council silt loam, 20 to 30 percent slopes	Council silt loam, 20 to 30 percent slopes	9.4	11.2%
NuF	Norden, Urne, and Dorenton soils, 20 to 45 percent slopes	Norden, Urne, and Dorenton soils, 20 to 45 percent slopes	31.2	37.2%
VwE	Valton-Wildale silt loams, 20 to 45 percent slopes	Valton-Wildale silt loams, 20 to 45 percent slopes	3.1	3.7%
WdB	Wildale silt loam, 2 to 6 percent slopes	Wildale silt loam, 2 to 6 percent slopes	1.8	2.2%
WdC2	Wildale cherty silt loam, 6 to 12 percent slopes, eroded	Wildale cherty silt loam, 6 to 12 percent slopes, eroded	16.4	19.6%
WdD2	Wildale cherty silt loam, 12 to 20 percent slopes, eroded	Wildale cherty silt loam, 12 to 20 percent slopes, eroded	21.9	26.1%
Totals for Area of Interest			83.9	100.0%

Description

A soil map unit is a collection of soil areas or nonsoil areas (miscellaneous areas) delineated in a soil survey. Each map unit is given a name that uniquely identifies the unit in a particular soil survey area.

Rating Options

Aggregation Method: No Aggregation Necessary

Tie-break Rule: Lower

Map Unit Description

The map units delineated on the detailed soil maps in a soil survey represent the soils or miscellaneous areas in the survey area. The map unit descriptions in this report, along with the maps, can be used to determine the composition and properties of a unit.

A map unit delineation on a soil map represents an area dominated by one or more major kinds of soil or miscellaneous areas. A map unit is identified and named according to the taxonomic classification of the dominant soils. Within a taxonomic class there are precisely defined limits for the properties of the soils. On the landscape, however, the soils are natural phenomena, and they have the characteristic variability of all natural phenomena. Thus, the range of some observed properties may extend beyond the limits defined for a taxonomic class. Areas of soils of a single taxonomic class rarely, if ever, can be mapped without including areas of other taxonomic classes. Consequently, every map unit is made up of the soils or miscellaneous areas for which it is named and some minor components that belong to taxonomic classes other than those of the major soils.

Most minor soils have properties similar to those of the dominant soil or soils in the map unit, and thus they do not affect use and management. These are called noncontrasting, or similar, components. They may or may not be mentioned in a particular map unit description. Other minor components, however, have properties and behavioral characteristics divergent enough to affect use or to require different management. These are called contrasting, or dissimilar, components. They generally are in small areas and could not be mapped separately because of the scale used. Some small areas of strongly contrasting soils or miscellaneous areas are identified by a special symbol on the maps. If included in the database for a given area, the contrasting minor components are identified in the map unit descriptions along with some characteristics of each. A few areas of minor components may not have been observed, and consequently they are not mentioned in the descriptions, especially where the pattern was so complex that it was impractical to make enough observations to identify all the soils and miscellaneous areas on the landscape.

The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The objective of mapping is not to delineate pure taxonomic classes but rather to separate the landscape into landforms or landform segments that have similar use and management requirements. The delineation of such segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, however, onsite investigation is needed to define and locate the soils and miscellaneous areas.

An identifying symbol precedes the map unit name in the map unit descriptions. Each description includes general facts about the unit and gives important soil properties and qualities.

Soils that have profiles that are almost alike make up a *soil series*. All the soils of a series have major horizons that are similar in composition, thickness, and arrangement. Soils of a given series can differ in texture of the surface layer, slope, stoniness, salinity, degree of erosion, and other characteristics that affect their use. On the basis of such differences, a soil series is divided into *soil phases*. Most of the areas shown on the detailed soil maps are phases of soil series. The name of a soil phase commonly indicates a feature that affects use or management. For example, Alpha silt loam, 0 to 2 percent slopes, is a phase of the Alpha series.

Some map units are made up of two or more major soils or miscellaneous areas. These map units are complexes, associations, or undifferentiated groups.

A *complex* consists of two or more soils or miscellaneous areas in such an intricate pattern or in such small areas that they cannot be shown separately on the maps. The pattern and proportion of the soils or miscellaneous areas are somewhat similar in all areas. Alpha-Beta complex, 0 to 6 percent slopes, is an example.

An *association* is made up of two or more geographically associated soils or miscellaneous areas that are shown as one unit on the maps. Because of present or anticipated uses of the map units in the survey area, it was not considered practical or necessary to map the soils or miscellaneous areas separately. The pattern and relative proportion of the soils or miscellaneous areas are somewhat similar. Alpha-Beta association, 0 to 2 percent slopes, is an example.

An *undifferentiated group* is made up of two or more soils or miscellaneous areas that could be mapped individually but are mapped as one unit because similar interpretations can be made for use and management. The pattern and proportion of the soils or miscellaneous areas in a mapped area are not uniform. An area can be made up of only one of the major soils or miscellaneous areas, or it can be made up of all of them. Alpha and Beta soils, 0 to 2 percent slopes, is an example.

Some surveys include *miscellaneous areas*. Such areas have little or no soil material and support little or no vegetation. Rock outcrop is an example.

Additional information about the map units described in this report is available in other soil reports, which give properties of the soils and the limitations, capabilities, and potentials for many uses. Also, the narratives that accompany the soil reports define some of the properties included in the map unit descriptions.

Report—Map Unit Description

Monroe County, Wisconsin

CnE—Council silt loam, 20 to 30 percent slopes

Map Unit Setting

Elevation: 700 to 1,400 feet

Mean annual precipitation: 28 to 33 inches

Mean annual air temperature: 46 to 52 degrees F

Frost-free period: 135 to 160 days

Map Unit Composition

Council and similar soils: 100 percent

Description of Council

Setting

Landform: Hills
Landform position (three-dimensional): Head slope
Down-slope shape: Concave
Across-slope shape: Concave
Parent material: Silty and/or loamy colluvium

Properties and qualities

Slope: 20 to 30 percent
Depth to restrictive feature: More than 80 inches
Drainage class: Well drained
Capacity of the most limiting layer to transmit water (Ksat): Moderately high to high (0.57 to 1.98 in/hr)
Depth to water table: More than 80 inches
Frequency of flooding: None
Frequency of ponding: None
Available water capacity: High (about 11.0 inches)

Interpretive groups

Farmland classification: Not prime farmland
Land capability (nonirrigated): 6e
Hydrologic Soil Group: B

Typical profile

0 to 8 inches: Silt loam
8 to 52 inches: Loam
52 to 60 inches: Loam

NuF—Norden, Urne, and Dorerton soils, 20 to 45 percent slopes

Map Unit Setting

Elevation: 800 to 1,400 feet
Mean annual precipitation: 28 to 33 inches
Mean annual air temperature: 46 to 52 degrees F
Frost-free period: 135 to 160 days

Map Unit Composition

Norden and similar soils: 40 percent
Urne and similar soils: 30 percent
Dorerton and similar soils: 15 percent

Description of Norden

Setting

Landform: Hills
Landform position (two-dimensional): Backslope, shoulder, summit
Down-slope shape: Convex
Across-slope shape: Convex

Parent material: Loess over loamy residuum weathered from glauconitic sandstone

Properties and qualities

Slope: 20 to 45 percent
Depth to restrictive feature: 20 to 40 inches to paralithic bedrock
Drainage class: Well drained
Capacity of the most limiting layer to transmit water (Ksat): Moderately low to high (0.14 to 1.98 in/hr)
Depth to water table: More than 80 inches
Frequency of flooding: None
Frequency of ponding: None
Available water capacity: Low (about 5.5 inches)

Interpretive groups

Farmland classification: Not prime farmland
Land capability (nonirrigated): 7e
Hydrologic Soil Group: B

Typical profile

0 to 3 inches: Loam
3 to 10 inches: Loam
10 to 29 inches: Loam
29 to 60 inches: Unweathered bedrock

Description of Urne

Setting

Landform: Hills
Landform position (two-dimensional): Backslope, summit, shoulder
Down-slope shape: Convex
Across-slope shape: Convex
Parent material: Loamy residuum weathered from glauconitic sandstone

Properties and qualities

Slope: 20 to 45 percent
Depth to restrictive feature: 20 to 40 inches to paralithic bedrock
Drainage class: Somewhat excessively drained
Capacity of the most limiting layer to transmit water (Ksat): Moderately low to high (0.14 to 1.98 in/hr)
Depth to water table: More than 80 inches
Frequency of flooding: None
Frequency of ponding: None
Available water capacity: Low (about 4.3 inches)

Interpretive groups

Farmland classification: Not prime farmland
Land capability (nonirrigated): 7e
Hydrologic Soil Group: B

Typical profile

0 to 2 inches: Fine sandy loam
2 to 32 inches: Very fine sandy loam
32 to 38 inches: Very fine sandy loam

38 to 60 inches: Weathered bedrock

Description of Dorerton

Setting

Landform: Hills

Landform position (two-dimensional): Summit, shoulder, backslope

Down-slope shape: Convex

Across-slope shape: Convex

Parent material: Loess over loamy residuum

Properties and qualities

Slope: 20 to 45 percent

Depth to restrictive feature: 45 to 70 inches to lithic bedrock

Drainage class: Well drained

Capacity of the most limiting layer to transmit water

(Ksat): Moderately high to high (0.57 to 1.98 in/hr)

Depth to water table: More than 80 inches

Frequency of flooding: None

Frequency of ponding: None

Available water capacity: Moderate (about 7.9 inches)

Interpretive groups

Farmland classification: Not prime farmland

Land capability (nonirrigated): 7e

Hydrologic Soil Group: B

Typical profile

0 to 4 inches: Silt loam

4 to 21 inches: Loam

21 to 56 inches: Channery loam

56 to 60 inches: Very channery loamy sand

VwE—Valton-Wildale silt loams, 20 to 45 percent slopes

Map Unit Setting

Mean annual precipitation: 28 to 33 inches

Mean annual air temperature: 46 to 52 degrees F

Frost-free period: 135 to 160 days

Map Unit Composition

Valton and similar soils: 50 percent

Wildale and similar soils: 30 percent

Description of Valton

Setting

Landform: Hills

Landform position (two-dimensional): Shoulder, backslope

Down-slope shape: Convex

Across-slope shape: Convex

Parent material: Loess over clayey residuum weathered from dolomite

Properties and qualities

Slope: 20 to 30 percent

Depth to restrictive feature: More than 80 inches

Drainage class: Well drained

Capacity of the most limiting layer to transmit water (Ksat): Very low to moderately low (0.00 to 0.14 in/hr)

Depth to water table: More than 80 inches

Frequency of flooding: None

Frequency of ponding: None

Available water capacity: Moderate (about 7.0 inches)

Interpretive groups

Farmland classification: Not prime farmland

Land capability (nonirrigated): 6e

Hydrologic Soil Group: B

Typical profile

0 to 9 inches: Silt loam

9 to 22 inches: Silt loam

22 to 60 inches: Silty clay

Description of Wildale**Setting**

Landform: Hills

Landform position (two-dimensional): Backslope, shoulder

Down-slope shape: Convex

Across-slope shape: Convex

Parent material: Loess over clayey residuum weathered from dolomite

Properties and qualities

Slope: 20 to 45 percent

Depth to restrictive feature: More than 80 inches

Drainage class: Well drained

Capacity of the most limiting layer to transmit water (Ksat): Very low to moderately low (0.00 to 0.14 in/hr)

Depth to water table: More than 80 inches

Frequency of flooding: None

Frequency of ponding: None

Available water capacity: Moderate (about 6.1 inches)

Interpretive groups

Farmland classification: Not prime farmland

Land capability (nonirrigated): 7e

Hydrologic Soil Group: C

Typical profile

0 to 9 inches: Silt loam

9 to 15 inches: Silty clay loam

15 to 60 inches: Clay

WdB—Wildale silt loam, 2 to 6 percent slopes

Map Unit Setting

Mean annual precipitation: 28 to 33 inches
Mean annual air temperature: 46 to 52 degrees F
Frost-free period: 135 to 160 days

Map Unit Composition

Wildale and similar soils: 100 percent

Description of Wildale

Setting

Landform: Hills
Landform position (two-dimensional): Summit
Down-slope shape: Convex
Across-slope shape: Convex
Parent material: Loess over clayey residuum weathered from dolomite

Properties and qualities

Slope: 2 to 6 percent
Depth to restrictive feature: More than 80 inches
Drainage class: Well drained
Capacity of the most limiting layer to transmit water (Ksat): Very low to moderately low (0.00 to 0.14 in/hr)
Depth to water table: More than 80 inches
Frequency of flooding: None
Frequency of ponding: None
Available water capacity: Moderate (about 6.1 inches)

Interpretive groups

Farmland classification: All areas are prime farmland
Land capability (nonirrigated): 2e
Hydrologic Soil Group: C

Typical profile

0 to 9 inches: Silt loam
9 to 15 inches: Silty clay loam
15 to 60 inches: Clay

WdC2—Wildale cherty silt loam, 6 to 12 percent slopes, eroded

Map Unit Setting

Mean annual precipitation: 28 to 33 inches
Mean annual air temperature: 46 to 52 degrees F
Frost-free period: 135 to 160 days

Map Unit Composition

Wildale and similar soils: 100 percent

Description of Wildale**Setting**

Landform: Hills

Landform position (two-dimensional): Summit

Down-slope shape: Convex

Across-slope shape: Convex

Parent material: Loess over clayey residuum weathered from dolomite

Properties and qualities

Slope: 6 to 12 percent

Depth to restrictive feature: More than 80 inches

Drainage class: Well drained

Capacity of the most limiting layer to transmit water (Ksat): Very low to moderately low (0.00 to 0.14 in/hr)

Depth to water table: More than 80 inches

Frequency of flooding: None

Frequency of ponding: None

Available water capacity: Moderate (about 6.1 inches)

Interpretive groups

Farmland classification: Farmland of statewide importance

Land capability (nonirrigated): 3e

Hydrologic Soil Group: C

Typical profile

0 to 9 inches: Silt loam

9 to 15 inches: Silty clay loam

15 to 60 inches: Clay

WdD2—Wildale cherty silt loam, 12 to 20 percent slopes, eroded**Map Unit Setting**

Mean annual precipitation: 28 to 33 inches

Mean annual air temperature: 46 to 52 degrees F

Frost-free period: 135 to 160 days

Map Unit Composition

Wildale and similar soils: 100 percent

Description of Wildale**Setting**

Landform: Hills

Landform position (two-dimensional): Shoulder, summit

Down-slope shape: Convex

Across-slope shape: Convex

Parent material: Loess over clayey residuum weathered from dolomite

Properties and qualities

Slope: 12 to 20 percent

Depth to restrictive feature: More than 80 inches

Drainage class: Well drained

Capacity of the most limiting layer to transmit water (Ksat): Very low
to moderately low (0.00 to 0.14 in/hr)

Depth to water table: More than 80 inches

Frequency of flooding: None

Frequency of ponding: None

Available water capacity: Moderate (about 6.1 inches)

Interpretive groups

Farmland classification: Not prime farmland

Land capability (nonirrigated): 4e

Hydrologic Soil Group: C

Typical profile

0 to 9 inches: Silt loam

9 to 15 inches: Silty clay loam

15 to 60 inches: Clay


Data Source Information

Soil Survey Area: Monroe County, Wisconsin

Survey Area Data: Version 7, May 13, 2009

APPENDIX B

Site Specific Maps and Information

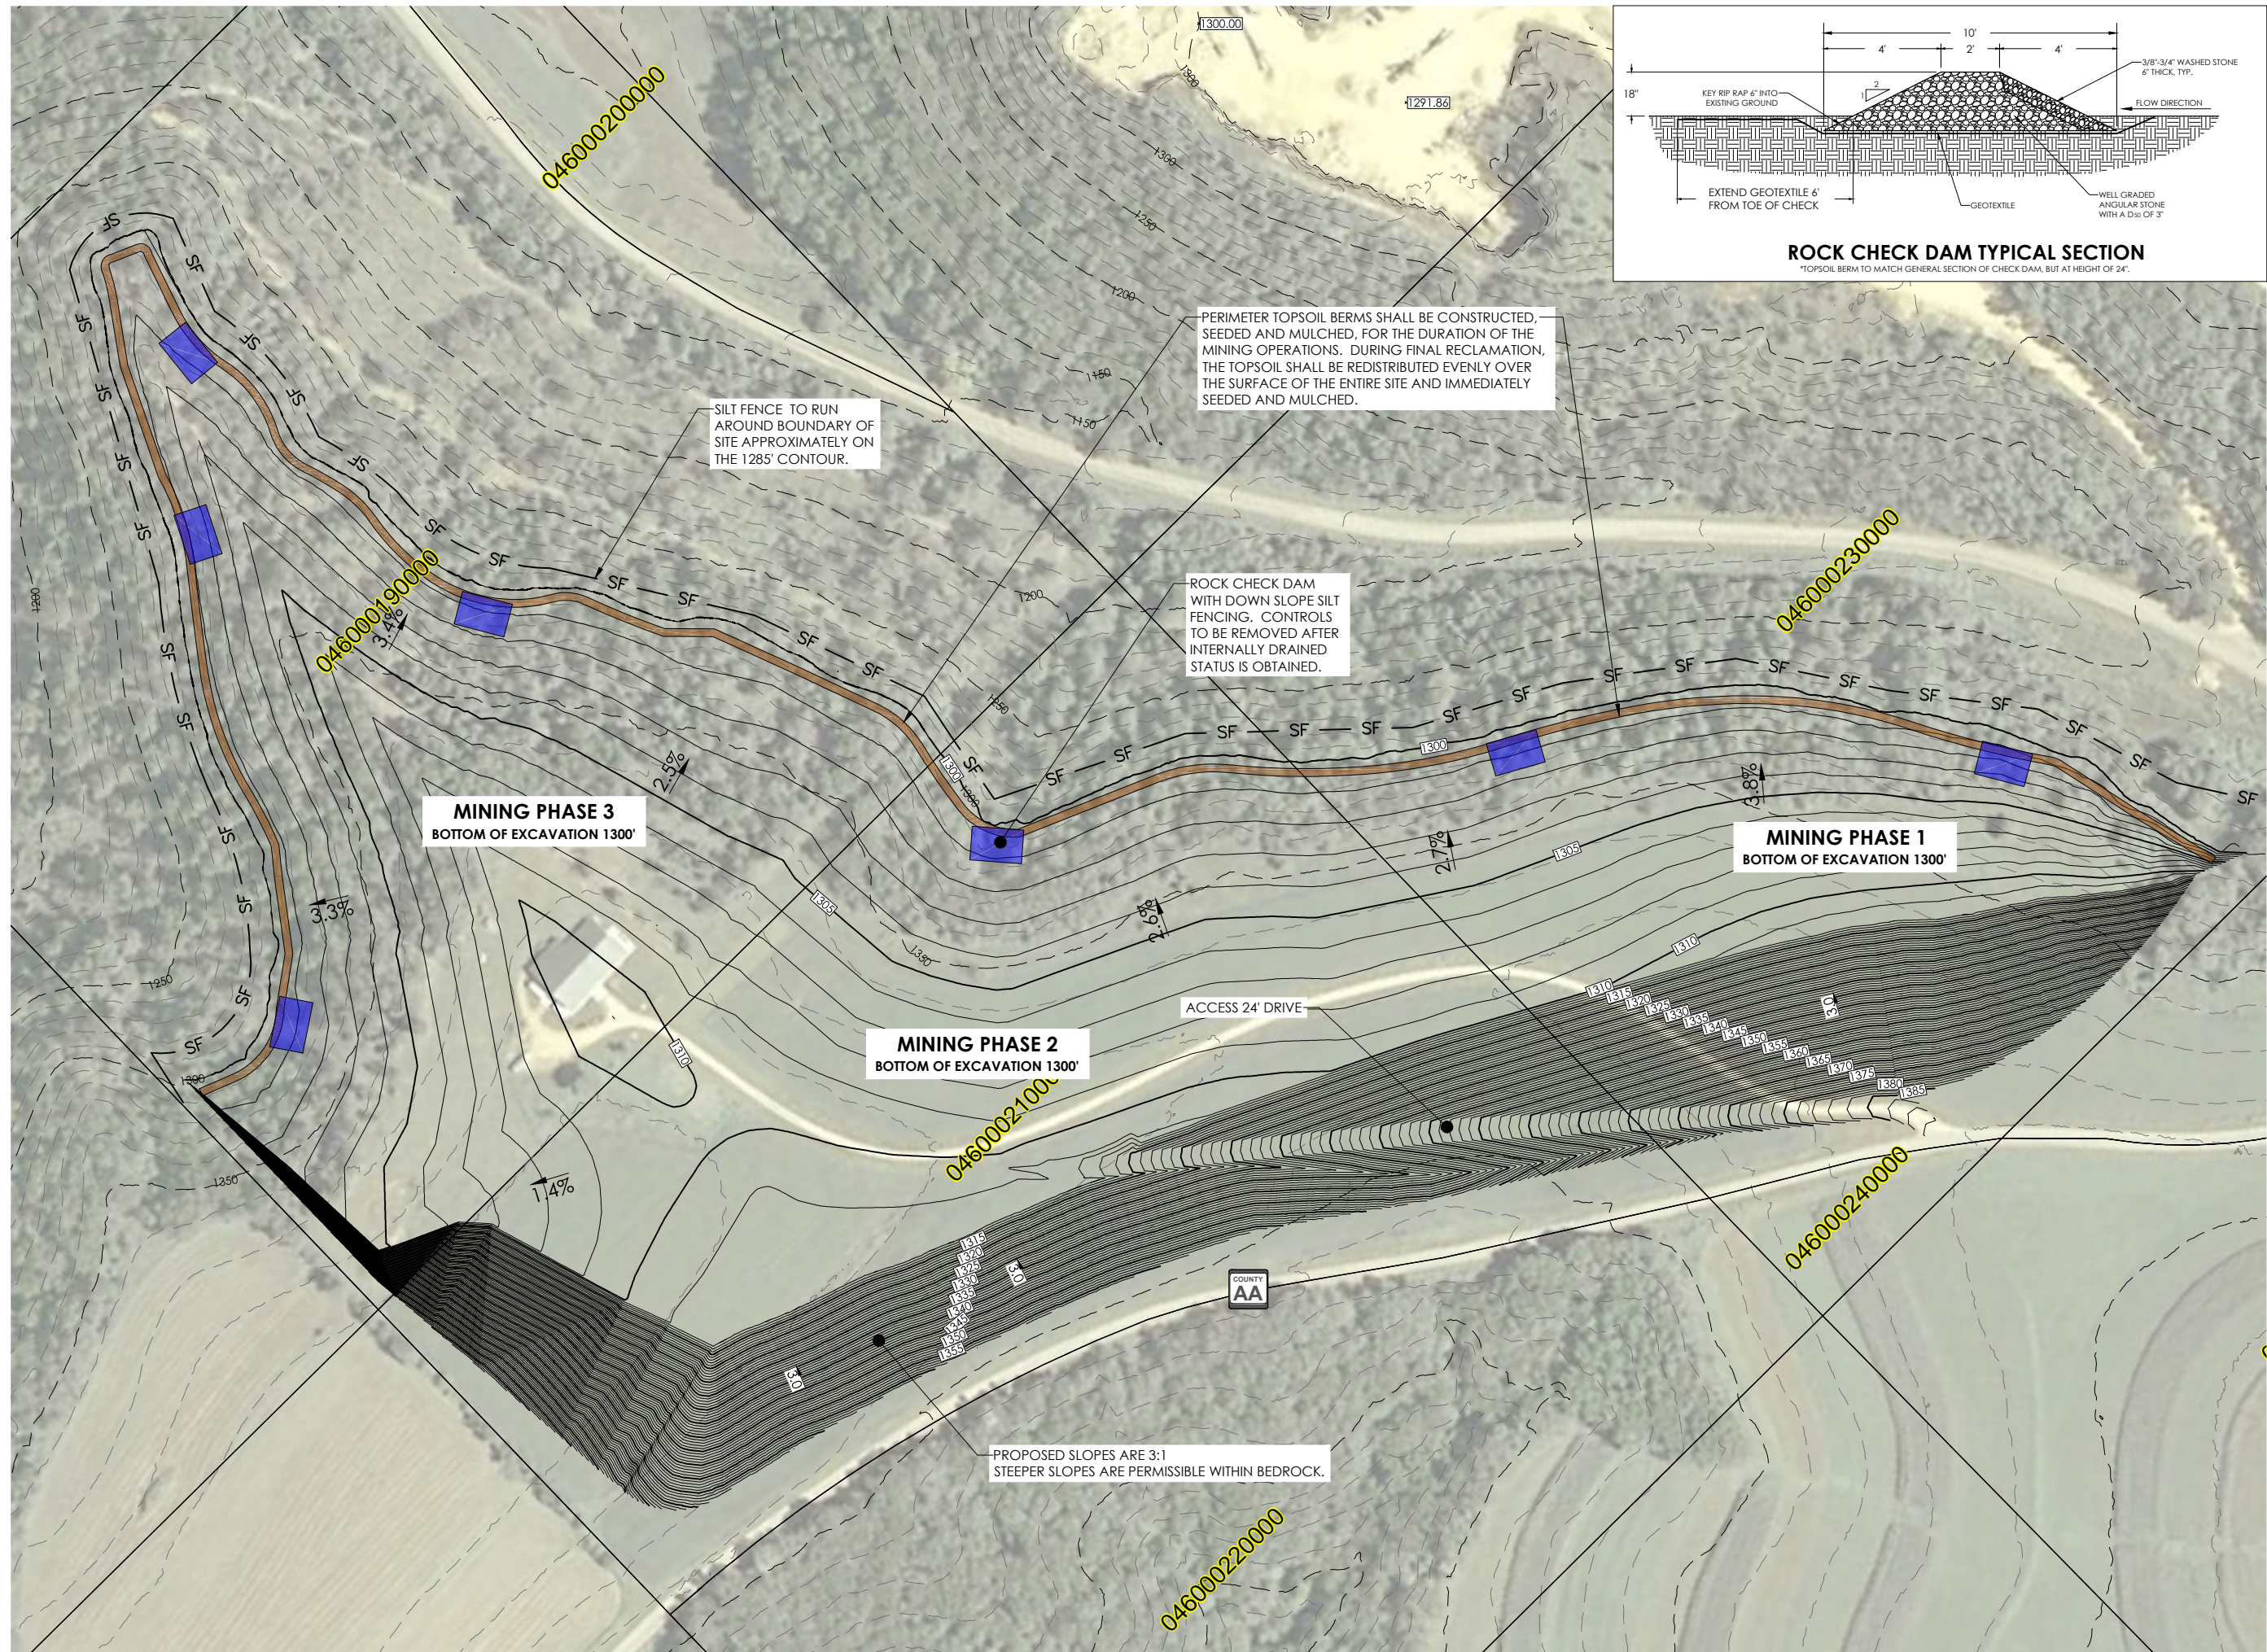


General Engineering Company
 General Engineering Company
 P.O. Box 340 • 916 Silver Lake Dr. • Portage, WI 53901
 608-742-2168 (Office) • 608-742-2592 (Fax)
 www.generalengineering.net

This document contains confidential or proprietary information of General Engineering Company. No portion of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, either in whole or in part except as specifically authorized by General Engineering Company.


PROPOSED QUARRY
 Gerke Excavating, Inc.
 Town of Wells
 Monroe County, WI

NO.	DATE	BY	REVISIONS



DRAWN BY: EDB
 DATE: Sept 2013
 GEC FILE NO.: 2-0113-46H
 SHEET NO.:

B1.0

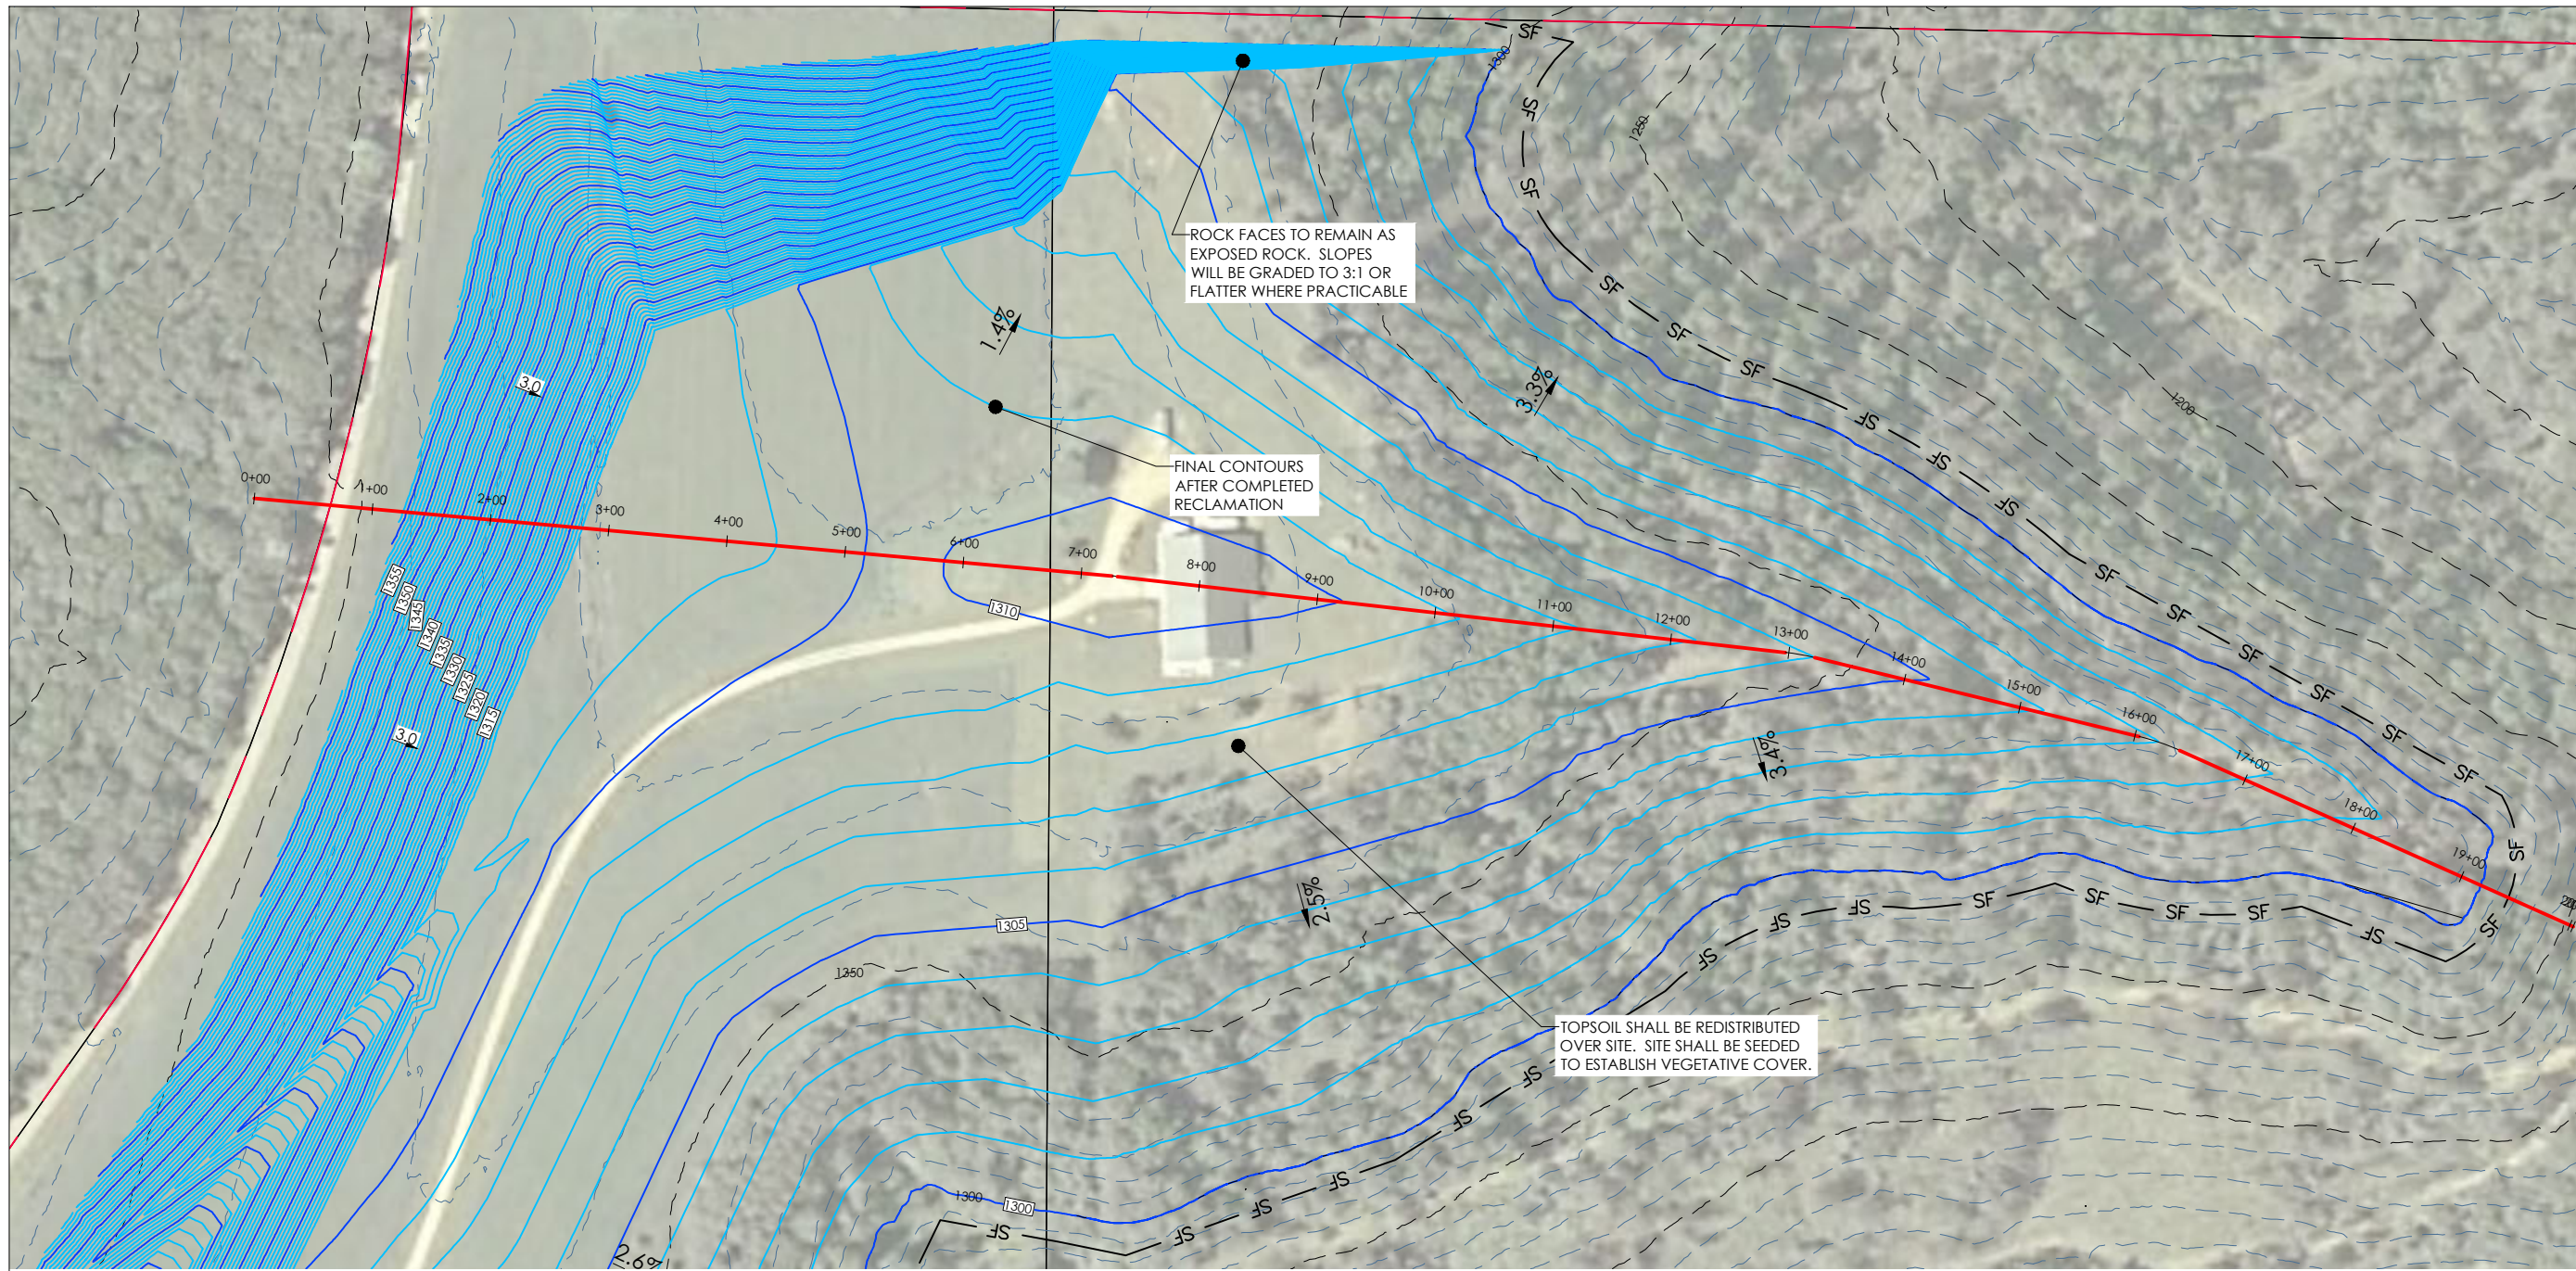

General Engineering Company


P.O. Box 340 • 916 Silver Lake Dr. • Portage, WI 53901
608-742-2188 (Office) • 608-742-2592 (Fax)

www.generalengineering.net
This document contains confidential or proprietary information of General Engineering Company. No part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, either in whole or in part except as specifically authorized by General Engineering Company.

RECLAIMED QUARRY
Gerke Excavating, Inc.


Town of Wells
Monroe County, WI

NO.	DATE	BY	REVISIONS




DRAWN BY: EDB
DATE: Sept 2013
GEC FILE NO.: 2-0113-46H
SHEET NO.:

B1.1

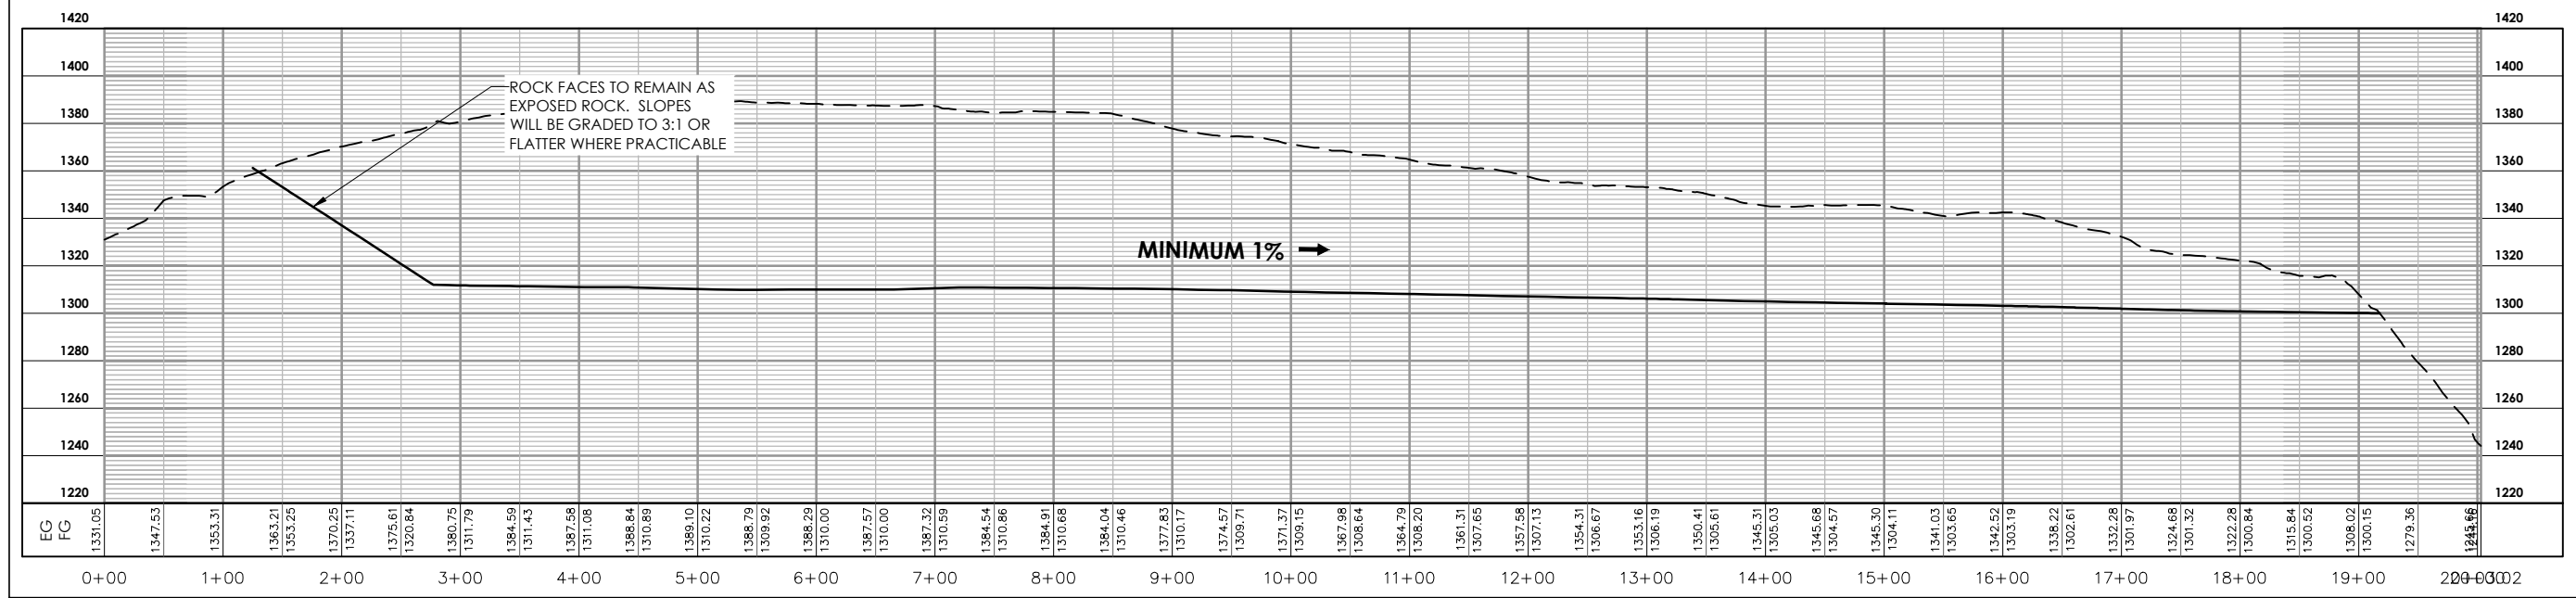


DATE	
BY	
NO.	
REVISIONS	





DRAWN BY: EDB
 DATE: June 2013
 GEC FILE NO.: 2-0113-46H
 SHEET NO.:

TEMPORARY DITCH CHECKS
 PURPOSE & OPERATION

PRODUCTS IN THIS CATEGORY ARE INTENDED FOR USE AT THE BOTTOM OF FILL SLOPES AND IN CHANNELS TO INTERCEPT AND POND SEDIMENT-LADEN RUNOFF. PONDING THE WATER REDUCES THE VELOCITY OF THE INCOMING FLOW AND ALLOWS MOST OF THE SEDIMENTS TO SETTLE OUT. WATER EXITS THE CHECK BY EITHER FILTERING THROUGH OR FLOWING OVER THE TOP.

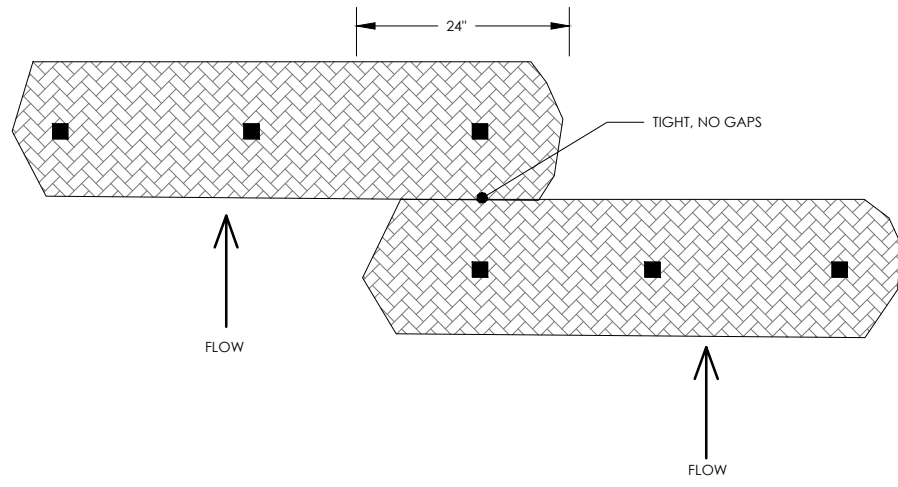


PLAN VIEW, OVERLAP

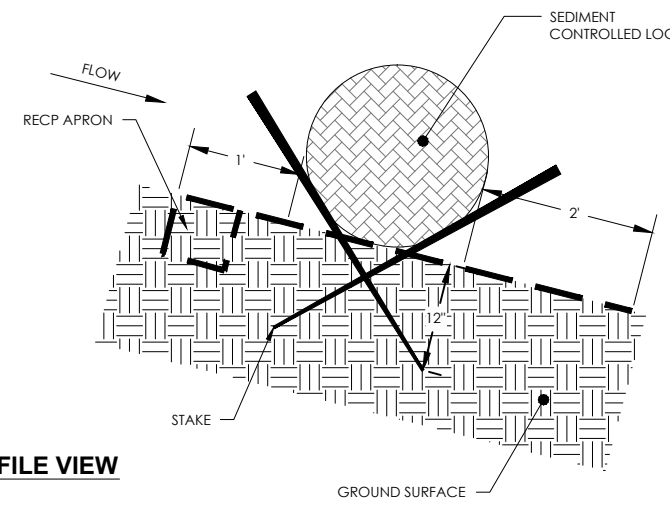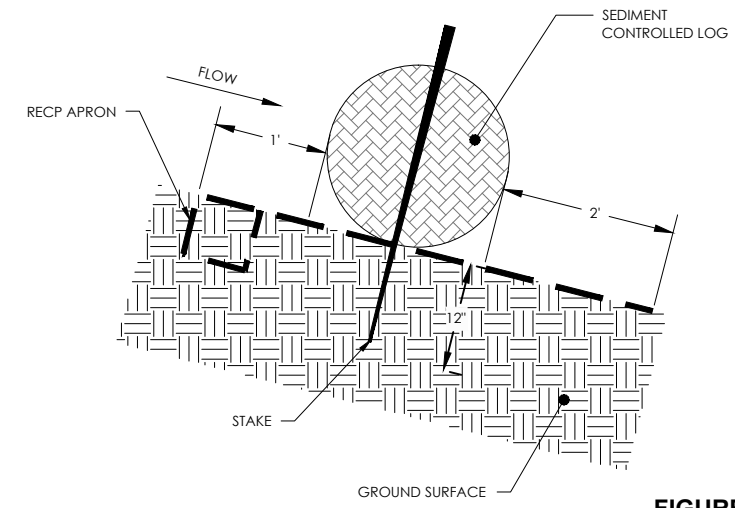

OR

FIGURE A - PROFILE VIEW

OVERLAP INSTALLATION

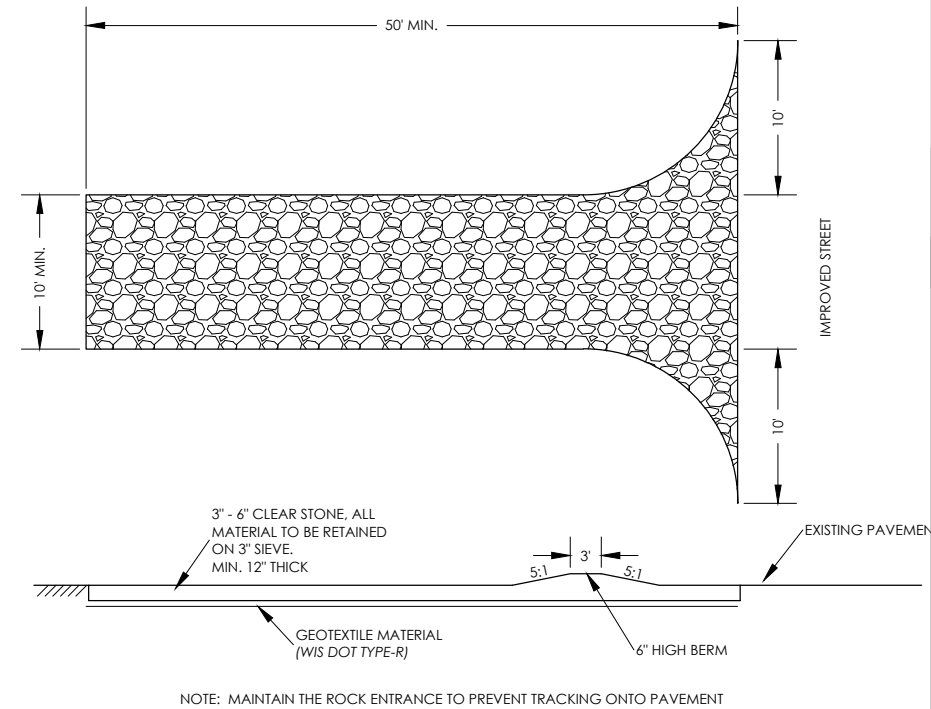

ROCK ENTRANCE

SLOPE/CHANNEL INSTALLATION

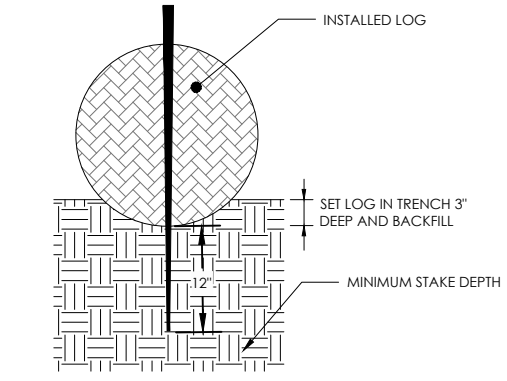


FIGURE B - PROFILE VIEW

FLAT GROUND INSTALLATION


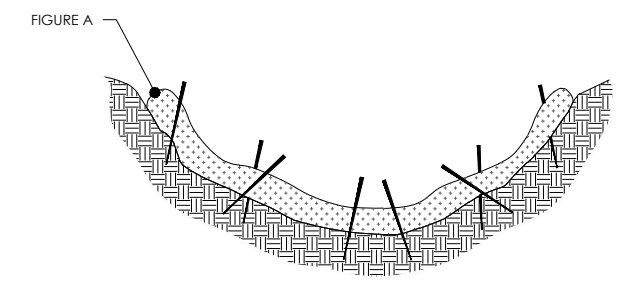



FIGURE C - CROSS-SECTION VIEW

CHANNEL INSTALLATION

- NOTES:
- HORIZONTAL BRACE WITH 2" X 4" WOODEN FRAME OR EQUIVALENT AT TOP OF POST AS DIRECTED BY THE ENGINEER.
 - TRENCH SHALL BE A MINIMUM OF 4" WIDE BY 6" DEEP TO BURY AND ANCHOR THE GEOTEXTILE FABRIC, FOLD MATERIAL TO FIT TRENCH AND BACKFILL AND COMPACT TRENCH AND COMPACT WITH EXCAVATED SOIL.
 - WOOD POST SHALL BE A MINIMUM SIZE OF 1 1/8" X 1 1/8" OF OAK OR HICKORY.

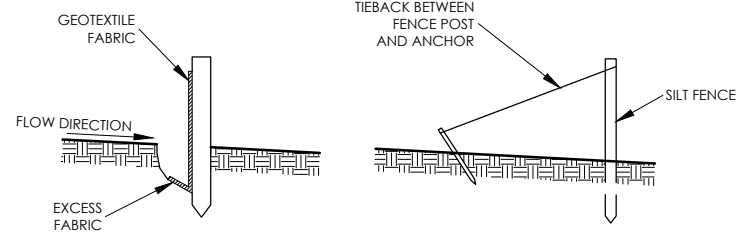

TRENCH DETAIL **SILT FENCE TIE BACK**
 WHEN REQUIRED BY ENGINEER

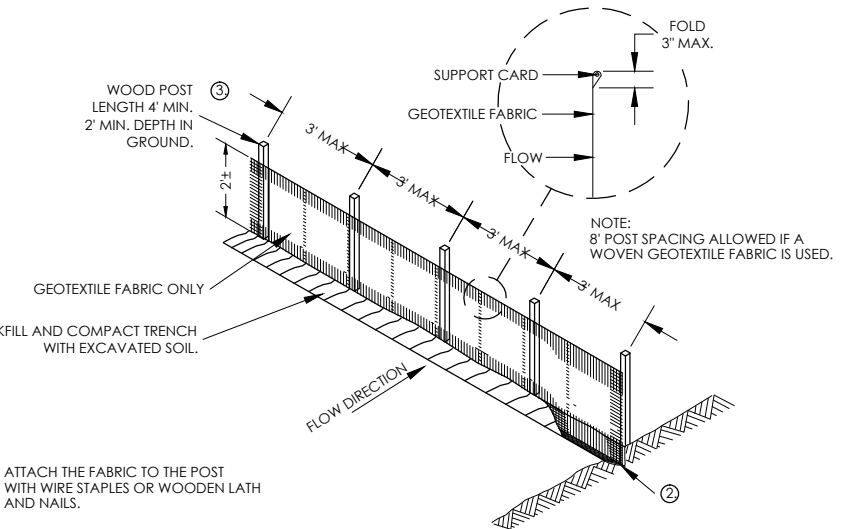

SILT FENCE

NONMETALLIC MINING RECLAMATION
Town of Wells
Monroe County, Wisconsin

SEED MIX SPECIFICATION

MIX 2 – STABILIZATION WILDLIFE / GRAZING MIX

Grasses, sedges and similar plants

Common Name	Scientific Name	pounds per acre
Agricultural Rye	<i>Secale cereale</i>	4
Timothy	<i>Phleum pratense</i>	2
Tall Fescue	<i>Festuca arundinaceae</i>	3
Switchgrass	<i>Panicum virgatum</i>	1
Big Bluestem	<i>Andropogon gerardi</i>	1
Canada Wild Rye	<i>Elymus Canadensis</i>	3
Alsike Clover	<i>Trifolium hybridum</i>	4
Red Clover	<i>Trifolium repens</i>	4
Alfalfa	<i>Medicago sativa</i>	5
		Total: 27 pounds per acre

APPENDIX C
Monroe County Nonmetallic
Mining Permit Application



PLEASE COMPLETE ALL INFORMATION ON THIS APPLICATION. PRINT OR TYPE. Use of this form is required for any nonmetallic mining reclamation permit application filed pursuant to Chapter NR 135, Wis. Adm. Code. Monroe County will not consider your application unless you complete and submit all information required by this application form.

<p>1. Applicant/Operator</p> <p>_____</p> <p>Address _____</p> <p>_____</p> <p>City, State, Zip Code _____</p> <p>_____</p> <p>Telephone No. (Include area code) _____</p>	<p>2. Property Owners/Lessors (if different from Applicant/Operator)</p> <p>_____</p> <p>Address _____</p> <p>_____</p> <p>City, State, Zip Code _____</p> <p>_____</p> <p>Telephone No. (Include area code) _____</p> <p>(Additional owner/lessor information can be submitted on separate sheet)</p>
--	--


3. Property Description: Provide the complete legal description of the property on which the mine is located (example: N ½, NE ¼, Section 3, T29N, R6E)

Town _____, City, Village of _____, County of MONROE

Tax Parcel Number _____

Total Site Acreage _____

4. General Location Map - draw the location of the site on the section map below. Include roads and any other pertinent information and label ¼ ¼ section points. Alternatively, attach a plat map, topographic map or other map of sufficient detail to enable access to the site by public roads

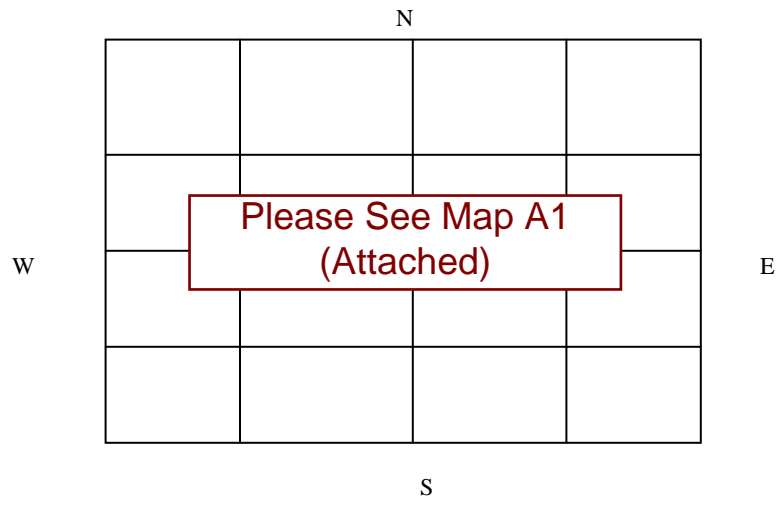

5. Project Information: Please provide a brief description of the general location (including surrounding land use) and the nature of the nonmetallic mine (type of deposit, proposed frequency and expected duration of mining activity).

6. Reclamation Plan: A reclamation plan conforming to s. NR 135.19, Wis. Adm. Code must be submitted with this permit application, including any previous regulatory approvals so long as they meet the reclamation standards of subch. II of NR 135 as allowed under ss. NR 135.21(1)(d) and (e), Wis. Adm. Code.

I hereby certify, as a duly authorized representative or agent, that the operator, _____ (name of operator), will provide, as a condition of the reclamation permit, financial assurance as required by s. NR 135.40, Wis. Adm. Code, upon granting of the reclamation permit and before mining begins.

I also certify that, if applicable, the land owner or lessor has been provided with a copy of the reclamation plan as required by s. NR 135.19(6)(b), Wis. Adm. Code and a signed certification from the landowner indicating their concurrence with the reclamation is attached to this application.

Signature of Applicant or Duly Authorized Agent

Date Signed

7. Fees:

Acres currently undisturbed that will be activated January 1, 2013 through December 31, 2013 _____ acres

Total fee for 2013 (includes DNR fee) (see table below) = \$ _____

I hereby certify that the information contained herein is true and accurate. I also certify that I am entitled to apply for a permit, or that I am the duly authorized representative or agent of an applicant who is entitled to apply for a permit.

Signature of Applicant or Duly Authorized Agent

Date Signed

FEE SCHEDULE

Mine Size, Unreclaimed Acres	2012 Monroe Co. Fee	Wisconsin DNR's Annual Fee	Total Annual Fee
			2012
1 to 5 acres	\$150	\$35	\$185
6 to 10 acres	\$300	\$70	\$370
11 to 15 acres	\$450	\$105	\$555
16 to 25 acres	\$600	\$140	\$740
26 to 50 acres	\$700	\$160	\$860
51 acres or larger	\$750	\$175	\$925

MAKE CHECKS PAYABLE TO: MONROE COUNTY LAND CONSERVATION DEPT.

LEAVE BLANK - FOR RECEIVING AGENCY USE ONLY

Permit No.	Date Received	Date Application Was Complete
Date Reclamation Plan Received: Received By:	Date Financial Assurance Received: Received By:	Amount



Engineers • Consultants • Inspectors

Metes and Bounds Report

Project Name: New Quarry Site, Gerke Excavating

Report Date: 9/10/2013

Client: Gerke Excavating

Prepared by: GEC

Metes and Bounds Description of Parcel

Beginning at the SW Corner of the NW ¼ of the SE ¼ of Section 1. T16N, R3W, Town of Wells, Monroe County, WI, whose Northing is 359432.114 and whose Easting is 660779.334 ;

- thence bearing N 1-15-36.623 E a distance of 1306.451 ;
- thence bearing S 89-36-5.084 E a distance of 1193.900 ;
- thence bearing S 5-23-1.391 W a distance of 84.824 ;
- thence bearing N 89-2-10.656 W a distance of 8.304 ;
- thence along a curve to the LEFT, having a radius of 90.501 a delta angle of 69° 26' 12.02", and whose long chord bears S 56-14-43.336 W a distance of 103.089 ;
- thence bearing S 21-31-37.329 W a distance of 207.721 ;
- thence along a curve to the LEFT, having a radius of 556.965 a delta angle of 20° 22' 31.63", and whose long chord bears S 11-20-21.511 W a distance of 197.025 ;
- thence bearing S 1-9-5.694 W a distance of 439.595 ;
- thence along a curve to the RIGHT, having a radius of 203.373 a delta angle of 79° 19' 13.11", and whose long chord bears S 40-48-42.250 W a distance of 259.598 ;
- thence bearing S 80-28-18.806 W a distance of 230.551 ;
- thence bearing N 80-28-18.806 E a distance of 230.551 ;
- thence along a curve to the LEFT, having a radius of 203.373 a delta angle of 79° 19' 13.11", and whose long chord bears N 40-48-42.250 E a distance of 259.598 ;
- thence bearing N 1-9-5.694 E a distance of 439.595 ;
- thence along a curve to the RIGHT, having a radius of 556.965 a delta angle of 20° 22' 31.63", and whose long chord bears N 11-20-21.511 E a distance of 197.025 ;
- thence bearing N 21-31-37.329 E a distance of 207.721 ;
- thence along a curve to the RIGHT, having a radius of 90.501 a delta angle of 69° 26' 12.02", and whose long chord bears N 56-14-43.336 E a distance of 103.089 ;
- thence bearing S 89-2-10.656 E a distance of 8.304 ;
- thence bearing S 5-23-1.391 W a distance of 246.120 ;
- thence along a curve to the LEFT, having a radius of 767.464 a delta angle of 09° 24' 36.44", and whose long chord bears S 4-8-16.747 W a distance of 125.905 ;
- thence along a curve to the LEFT, having a radius of 751.867 a delta angle of 09° 36' 20.30", and whose long chord bears S 6-21-31.423 E a distance of 125.903 ;
- thence bearing S 14-19-21.551 E a distance of 141.409 ;
- thence bearing S 19-23-28.643 E a distance of 307.029 ;
- thence bearing S 1-9-0.064 W a distance of 298.875 ;
- thence bearing S 89-39-47.833 E a distance of 1327.356 ;

Portage •

Black River Falls •

La Crosse



General Engineering Company
P.O. Box 340
916 Silver Lake Drive
Portage, WI 53901



608-742-2169 (Office)
608-742-2592 (Fax)
gec@generalengineering.net
www.generalengineering.net

Engineers • Consultants • Inspectors

- thence bearing S 1-2-22.751 W a distance of 1303.517 ;
- thence bearing N 89-43-29.875 W a distance of 1006.720 ;
- thence bearing N 52-51-50.975 W a distance of 91.970 ;
- thence bearing N 54-15-2.590 W a distance of 91.970 ;
- thence bearing N 59-18-45.790 W a distance of 198.851 ;
- thence bearing N 57-37-49.316 W a distance of 349.404 ;
- thence bearing N 54-45-16.240 W a distance of 226.918 ;
- thence along a curve to the LEFT, having a radius of 1340.164 a delta angle of 04° 33' 29.28", and whose long chord bears N 58-35-50.703 W a distance of 106.588 ;
- thence bearing N 62-8-56.073 W a distance of 53.305 ;
- thence along a curve to the LEFT, having a radius of 2007.364 a delta angle of 16° 28' 50.77", and whose long chord bears N 74-39-38.555 W a distance of 575.417 ;
- thence bearing N 84-57-51.553 W a distance of 144.321 ;
- thence bearing N 1-15-36.788 E a distance of 540.122 to the point of beginning.

Portage


Black River Falls

La Crosse



Consulting Engineering • Structural Engineering • Building Design • Environmental Services • Building Inspection • GIS Services
Grant Procurement & Administration • Land Surveying • Zoning Administration • Mechanical, Electrical, & Plumbing Services



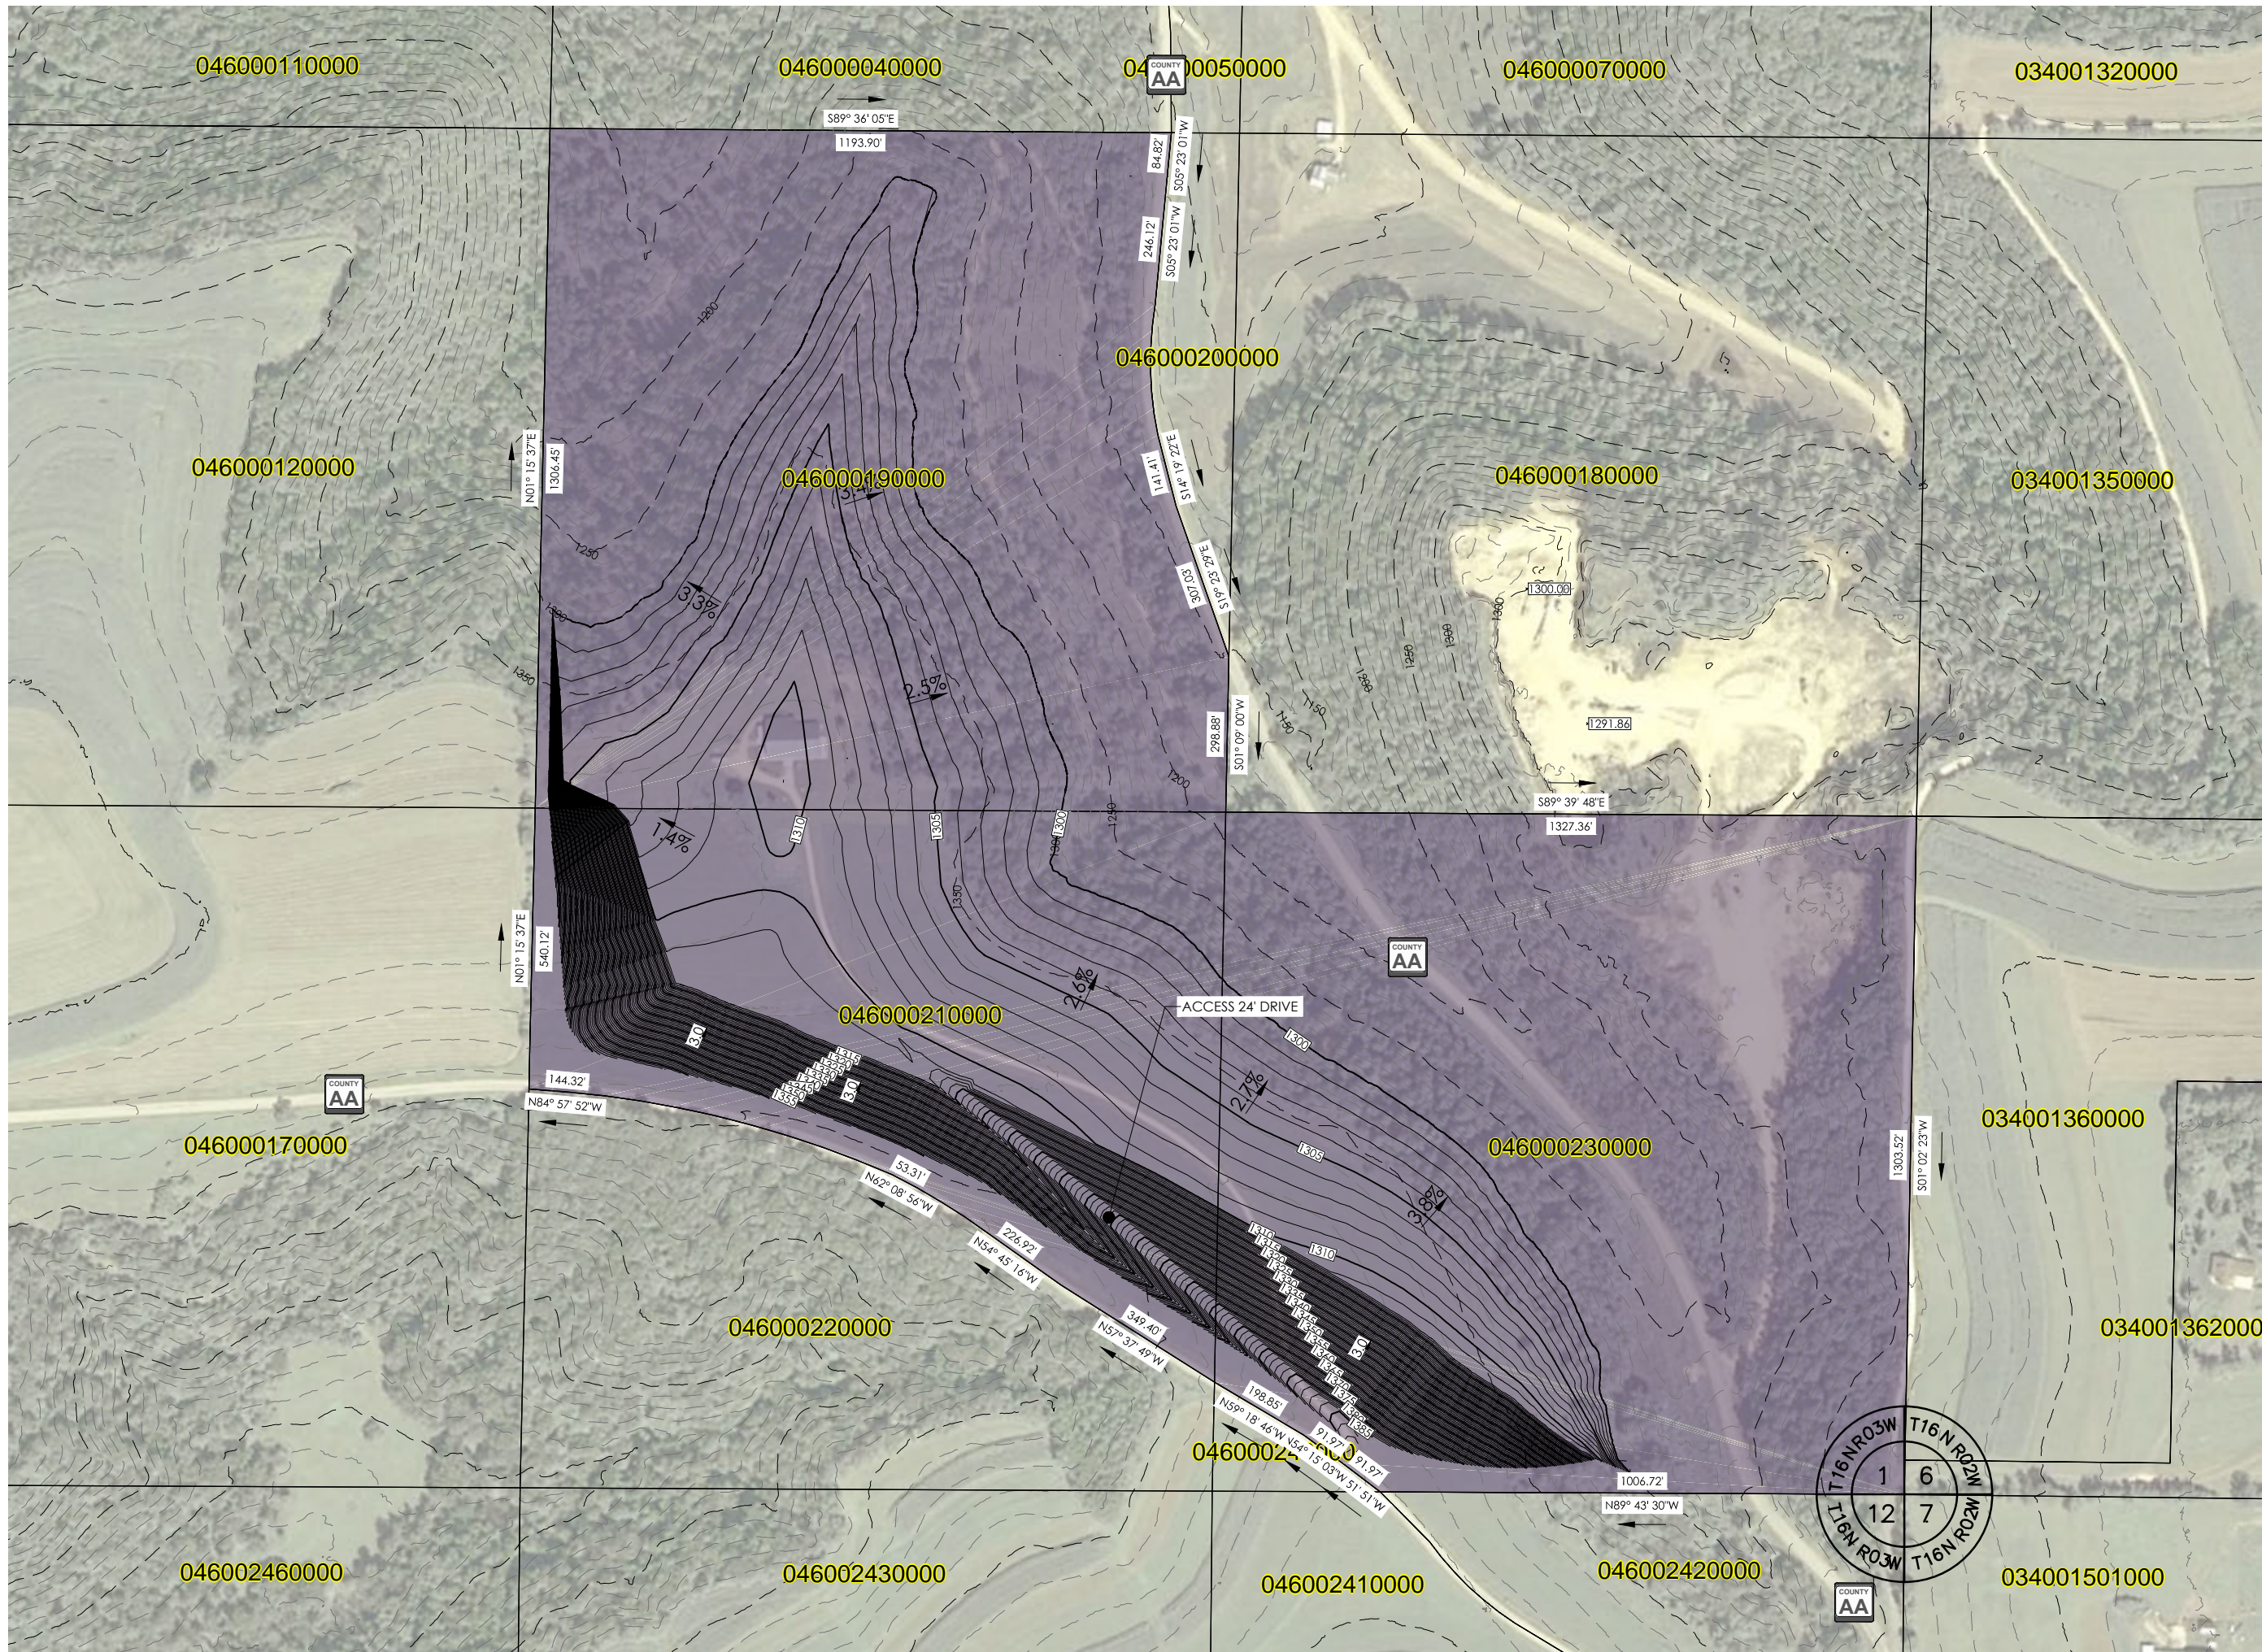


General Engineering Company
 P.O. Box 340 • 916 Silver Lake Dr. • Portage, WI 53901
 608-742-2168 (Office) • 608-742-2592 (Fax)
 www.generalengineering.net

This document contains confidential or proprietary information of General Engineering Company. No part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, either in whole or in part except as specifically authorized by General Engineering Company.

PROPOSED QUARRY
 Gerke Excavating, Inc.
 Town of Wells
 Monroe County, WI

REVISIONS	NO.	BY	DATE



DRAWN BY: EDB
 DATE: Sept 2013
 GEC FILE NO.: 2-0113-46H
 SHEET NO.: **C5.0**